

F202 Basket Filter

Formerly **083**

Sizes 1/2 through 6 inch, ANSI Class 150



Tufline fully lined basket filters are used in a variety of corrosive services for the removal of debris from the pipeline or solid particles from the media.

Refer to page 18 for pressure-temperature ratings.

Materials of construction

Body	PFA lined ductile iron
Filter	PTFE
Bolting	B7 Carbon steel

Other lining materials available upon request.

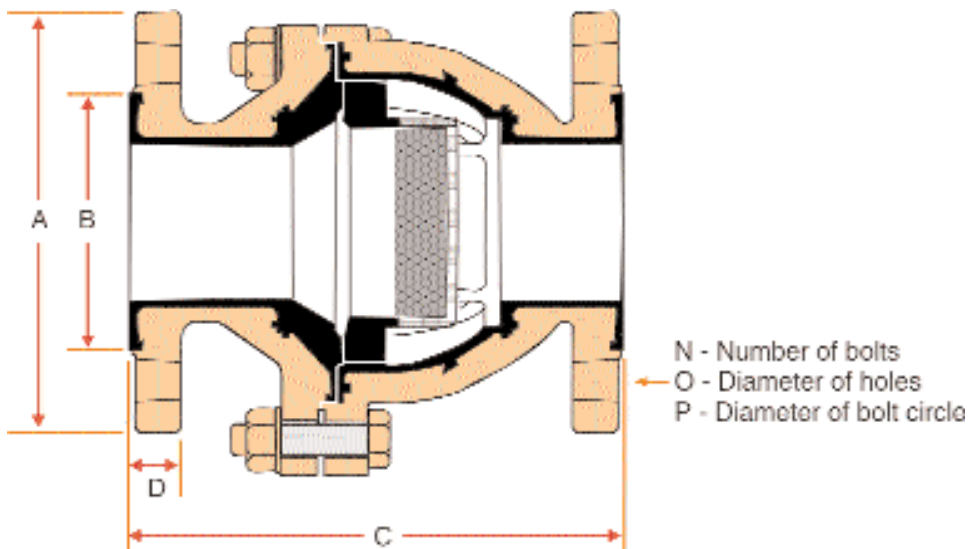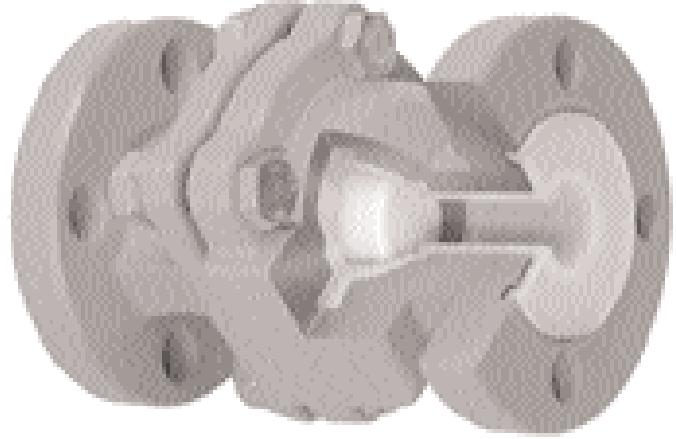

Dimensions (inches)

Size	A	B	C	D	N	O	P	Wt. lbs.	Opening Pressure Vertical Installation PSI
1/2	3.50	1.57	5.12	0.59	4	0.62	2.36	9	0.28
3/4	3.86	1.97	5.91	0.79	4	0.62	2.72	11	0.16
1	4.25	2.01	6.00	0.91	4	0.62	3.11	11	0.13
1 1/2	5.00	2.87	7.00	1.42	4	0.62	3.86	23	0.17
2	5.98	3.62	8.00	1.85	4	0.75	4.72	29	0.17
3	7.52	4.92	9.50	3.07	8	0.75	5.98	68	0.32
4	9.02	6.18	11.50	3.74	8	0.75	7.50	103	0.46
6	10.92	8.27	14.00	5.71	8	0.88	9.49	189	0.54