

K202 Tank Bottom Valve

Formerly 092

Sizes 1 through 6 inch, ANSI Class 150


Tufline lined tank bottom valves allow efficient discharge of corrosive fluids from bulk liquid tanks.

Refer to page 18 for pressure-temperature ratings.

Tank Connection Flange

The tank connection flange can be supplied in various sizes per the table below:


Output Size	Connection Size (inches)
1	1½ or 2
1½	2
2	3 or 4
3	4
4	6
6	8

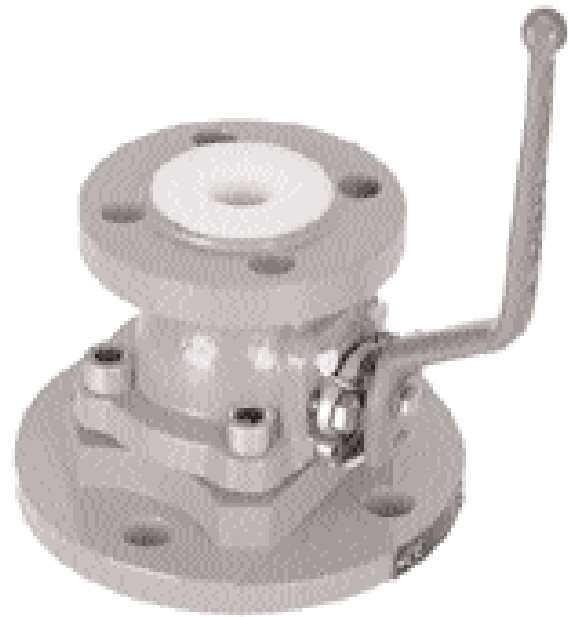

Materials of construction

Body	PFA lined ductile iron
Ball	PFA lined ductile iron
Stem	PFA lined stainless steel
Gland	Stainless steel
Handle	Cast ductile iron
Flange	PFA lined ductile iron
Bolting	B7 carbon steel
Stem packing	PTFE
Seat	PTFE

Other lining materials available upon request.

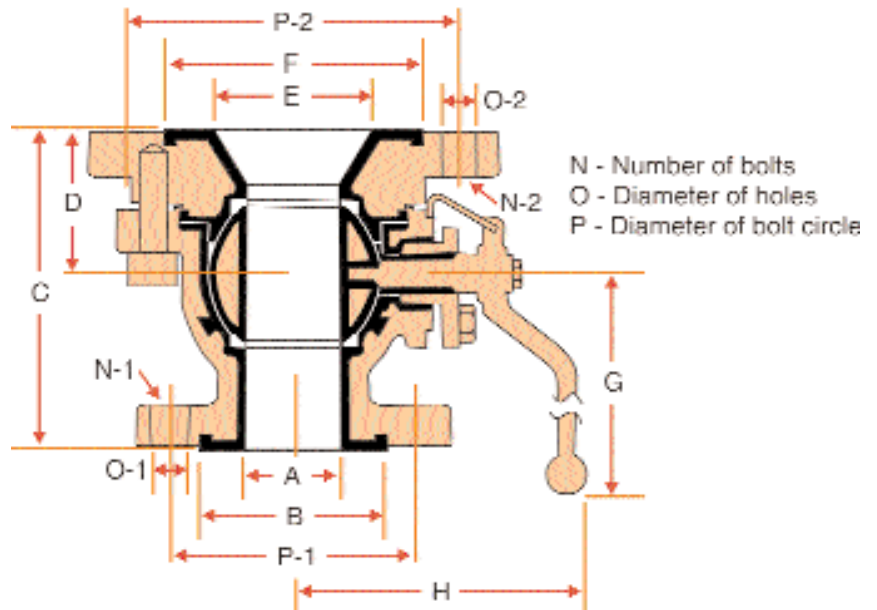

Size	A	B	C	D	E	F	G	H	N-1	O-1	P-1	N-2	O-2	P-2
1	1	2.01	4.80	2.44	1.50	2.87	6.61	4.53	4	0.75	3.13	4	0.63	3.87
1	1	2.01	4.80	2.44	2	3.78	6.61	4.53	4	0.75	3.13	4	0.74	4.74
1½	1.50	2.87	6.50	2.52	2	3.78	6.61	5.31	4	0.75	3.87	4	0.74	4.74
2	2	3.62	7.48	4.06	3	4.92	7.87	5.71	4	0.75	4.75	4	0.74	6.00
2	2	3.62	6.22	2.79	4	6.18	7.87	5.71	4	0.75	4.75	8	0.74	7.50
3	3	4.92	9.49	4.84	4	6.18	11.50	7.72	4	0.75	6.10	8	0.74	7.50
4	4	6.18	10.20	4.88	6	8.27	19.69	8.86	8	0.75	7.50	8	0.91	9.45
6	6	8.27	12.20	5.51	8	11.31	19.69	10.04	8	0.87	9.49	8	0.91	11.42