

Condensed Product Guide



define
design
deliver



ABOUT HAYWARD® FLOW CONTROL

Hayward Flow Control, a division of Hayward Industries, Inc., and based in Clemmons, NC, USA, has been a leading manufacturer of industrial thermoplastic valves and process control products for more than 60 years. Thousands of customers worldwide have installed our products into aggressive and corrosive systems, as well as delicate life support systems where the strictest chemical balance is required. We understand the specific demands of industrial piping and are committed to offering advantageous products for your application that will keep your systems working.

Hayward Flow Control products carry an industry-leading, full two-year warranty. As an ISO 9001:2008 certified company, we strive for the highest quality product possible for use in a wide range of demanding applications.

THERMOPLASTIC VALVES, ACTUATION AND CONTROLS

Hayward manufactures flow control products in thermoplastic materials including PVC, CPVC, PP, GFPP and PVDF. These materials are non-conductors and are immune to electrolytic and galvanic corrosion. Equally important, they contain nothing to leach out and contaminate sensitive fluids or delicate ecosystems. In addition, Hayward offers one of the industry's largest range of pneumatic and electric actuators and accessories, allowing you the ability to control your systems with one partner. Starting with simple actuated ball valves up to 24" butterfly valves with proportional control, Hayward continues to provide customers with an industry-leading choice of valve actuation packages to satisfy the most demanding application requirements.

HAYWARD'S STRAINERS AND FILTERS

Hayward's industry leading Basket and Y-Strainers are designed to protect pipeline system components from dirt and debris while allowing process media to flow freely. Simplex and duplex Basket Strainers are manufactured in PVC, CPVC, GFPP and clear Eastar, and are available with thermoplastic, stainless steel or specialty alloy baskets in a variety of perms and meshes. Y-Strainers are offered in PVC, clear PVC or CPVC materials with FPM or EPDM o-ring seals and a range of perforated thermoplastic or metal screens.

Unlike traditional metal and plastic filters, Hayward's patent pending GFPP FLV Series Bag Filter features a one-piece injection molded thermoplastic glass filled polypropylene body with true union end connections, ergonomic cover design with liquid displacing dome, vent valve and drain plug. Available in simplex through quadplex assembly, the FLV Series can also accommodate a single 7" cartridge or up to five 2-1/2" cartridges.

CORROSION RESISTANT THERMOPLASTIC PUMPS

To complete our product range of thermoplastic solutions, Hayward's pumps perform reliably in systems pumping water, corrosive liquids and ultra-pure fluids. Choose from centrifugal, vertical, horizontal end suction, and immersible pumps or horizontal magnetic drive pumps. Recently added to the Hayward Pump line are our A-Series Aquatic Pumps dedicated for the Aquariums and Aquaculture and the Z Series Solenoid Diaphragm Valve line.

NEW INNOVATIONS FROM HAYWARD

Hayward Flow Control now offers a full range of innovative and corrosion resistant Instrumentation, Chemical Feed and Metering solutions for your process and dosing system's needs. These new categories of product solutions from Hayward include solenoid diaphragm pumps, flow meters, level sensors and thermoplastic pressure gauges, calibration columns and injection quills, all to measure and regulate your system's performance. When packaged with our industry leading thermoplastic valves, actuations, filters, strainers and pumps, Hayward provides you with a complete package of flow control solutions to make your piping systems perform to your needs.



BACKED BY HAYWARD FLOW
CONTROL'S EXCLUSIVE
TWO YEAR WARRANTY

TABLE OF CONTENTS

VALVES AND ACCESSORIES

TB Series True Union Ball Valves	4
TBZ Series "Z-Ball" True Union Ball Valves	5
CV Series Profile2™ Proportional Control Ball Valves	5
TW Series Three-Way True Union Ball Valves	6
LA Series Lateral Three-Way True Union Ball Valves	6
QV Series QIC2™ Compact Ball Valves	7
Valve-Safe Lockouts	7
TBB Series Commercial True Union Ball Valves	8
QTA Series Commercial True Union Compact Ball Valves	8
QVC Series Commercial Compact Ball Valves	8
SW Series Swing Check Valves	9
WCV Series Full Pattern Wafer Check Valves	9
WC Series Wafer Check Valves	9
TC Series True Union Ball Check Valves	10
YC Series Y-Check Valves	10
SLC Series Spring-Loaded Y-Check Valves	10
BYV Series Butterfly Valves	11
BYB Series Large Diameter Butterfly Valves	11
BYCN/BYCS Series Butterfly Valves	11
DAB Series True Union Diaphragm Valves	12
DAB Series Flanged Diaphragm Valves	12

ACTUATION AND CONTROLS

LHB Series Manual Limit Switch	13
SV Series True Union Solenoid Valves	13
EA Series Automated True Union Ball Valves	14
EAU Series Automated True Union Ball Valves	14
ECP Series Automated True Union Ball Valves	14
PM Series Automated True Union Ball Valves	15
PMD/PMS Series Pneumatic Actuators	15
GFPP PMD4/PMS4 Series Pneumatic Actuators	16
PCD/PCS Series Pneumatic Actuators	16
EAU Series Electric Actuators	17
ECP Series Glass Filled Polypropylene Electric Actuators	17
HZSN1 Series On/Off/Proportional Electric Actuators	18
HRS Series On/Off/Proportional Electric Actuators	18

PRESSURE AND FLOW CONTROL VALVES

RV Series Pressure Relief Valves	19
PR Series Pressure Regulator Valves	19
PBV Series Back Pressure Valves	20
RPV Series Pressure Relief Valves	20
CCS Series Calibration Cylinders/Columns	21
IV Series Injection Valves/IQ Series Injection Quills	21
CS Series Corporation Stops	21
AV Series Angle Globe Valves	22
NVA Series Needle Valves	22
LC Series Universal Stopcock™	22

STRAINERS AND FILTERS

YS Series Y-Strainers	23
SB Series Simplex Basket Strainers	23
DB Series Duplex Basket Strainers	24
FLV/CFLV Series Simplex Bag and Cartridge Filters	25

FLV/CFLV Series Duplex Bag and Cartridge Filters	25
FLV Series PVC and CPVC Bag Filters	26
LS Series Aquatic Sand Filter	26
Heavy-Duty Filter Bags	27
Cartridge Filter Adapter Kits Option	27
Pleated Filter Cartridges	27

CORROSION RESISTANT PUMPS

A Series LifeStar®VS Aquatic Pump	28
A Series LifeStar® Aquatic Pump	28
T Series Vertical Seal-Less Immersible Pumps	29
S Series Vertical Seal-Less Immersible Pumps	29
D Series Vertical Seal-Less Immersible Pumps	29
R Series Magnetic Drive Pumps	30
C Series Centrifugal Pumps	30
In-Tank Filtration Systems	30
Z Series Solenoid Diaphragm Metering Pumps	31

INSTRUMENTATION

HLS Series Advanced Submersible Pressure Level Transmitter	32
TLF Series Pressure Level Junction Box	32
HLST Series Indicating Level Transmitter	32
TF Series Multi-Function True Union Paddlewheel Flow Meter	33
TFT Series Insertion Paddlewheel Flow Meter with Transmitter	33
TLV Series Flow Display, Totalizer, Batcher and Transmitter	33
TLC Series Level Process Display	34
TLM Series Industrial Panel Mount Level Transmitter	34
VSA Series Industrial Visual/Audible Sentry Alarm System	34
GG Series Gauge Guards	35
GA Series Pressure Gauge & Isolator	35
GDS Series Double Sided All Thermoplastic Liquid Filled Pressure Gauge & Isolator	35
GD Series Digital LED Pressure Alarm	36
GLD Series LED Pressure Gauge & Isolators	36

BULKHEAD FITTINGS AND TANK ACCESSORIES

BFAS Series Bulkhead Fittings	37
BFA Series Bulkhead Fittings	37
Tank Adapter Fittings	38
CCP Series Tank-Tite™	38
SF Series Self-Aligning Bulkhead Fittings	38
AR Series Air Release Valves	39
VB Series Vacuum Breakers	39
BVX Series Ready Flanges	39

TECHNICAL INFORMATION

Operating Temperature/Pressure	40
Pressure Loss Calculation Using Cv Factor	40
Basket Sizes for Hayward Simplex/Duplex Thermoplastic Strainers	41
Operating Temperature/Pressure for Bag & Cartridge Filter Housings	41
Z Series Specifications	41

TB Series True Union Ball Valves

1/4" TO 2" PVC / 1/2" TO 2" PVC, CPVC AND GFPP



PVC and CPVC

KEY FEATURES

- PVC, CPVC and GFPP
- Full Port Design
- Reversible PTFE Seats
- Double O-Ring Stem Seals
- Easily Actuated
- NSF/ANSI 61 Listed (PVC and CPVC)

OPTIONS

- Lockouts Available
- 2" Square Operating Nut
- Stem Extensions
- Pneumatic and Electric Actuators
- Spring Return Handle

SELECTION CHART

SIZE**	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/4" – 3/8" (DN8 – DN10)	PVC	Socket and Threaded		250 PSI @ 70°F 17 Bar @ 21°C Non-Shock
1/2" – 2" (DN15 – DN50)	PVC or CPVC	Socket and Threaded or Flanged*	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
	GFPP	Threaded, Socket Fusion or Flanged		

* All flanged valves are rated to 150 PSI @ 70°F Non-Shock (10 Bar @ 21°C)
 **PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.
 PP socket fusion ends per ASTM F2389 and threaded ends per BS21.
 Flanged ends available in DIN/EN PN10.

TB Series True Union Ball Valves

2-1/2" TO 6" PVC AND CPVC

KEY FEATURES

- PVC and CPVC
- Full Port Design Through 4"
- Reversible PTFE Seats
- Double O-Ring Stem Seals
- Easily Actuated
- NSF/ANSI 61 Listed (2-1/2"-4")
- Actuator-Ready Design

OPTIONS

- Pneumatic and Electric Actuators
- Lockouts Available
- Gear Operator
- 2" Square Operating Nut
- Stem Extensions
- Spring Return Handle

SELECTION CHART

SIZE***	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
2-1/2" – 4" (DN65 – DN100)	PVC or CPVC	Socket, Threaded or Flanged**	FPM or EPDM	235 PSI @ 70°F 16 Bar @ 21°C Non-Shock
6" (DN150)		Flanged		150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* 4" valve venturied to 6" ** All flanged valves are rated to 150 PSI @ 70°F Non-Shock (10 Bar @ 21°C)
 *** PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.
 Flanged ends available in DIN/EN PN10.



2-1/2" – 4"



TBZ Series "Z-Ball" True Union Ball Valves

1/2" TO 6" PVC AND CPVC

KEY FEATURES

- PVC and CPVC
- Full Port Design
- Reversible PTFE Seats
- Double O-Ring Stem Seals
- For Sodium Hypochlorite Applications
- Adjustable Seat Retainer

OPTIONS

- Lockouts Available
- Stem Extensions
- Spring Return Handle
- Pneumatic and Electric Actuators
- 2" Square Operating Nut

SELECTION CHART

SIZE***	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 2" (DN15 – DN50)	PVC or CPVC	Socket and Threaded or Flanged**	FPM	250 PSI @ 70°F 17 Bar @ 21°C Non-Shock
2-1/2" – 4" (DN63 – DN100)		Socket, Threaded or Flanged**		235 PSI @ 70°F 16 Bar @ 21°C Non-Shock
6" (DN150)		Flanged		150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* 4" valve venturied to 6" ** All flanged valves are rated to 150 PSI @ 70°F Non-Shock (10 Bar @ 21°C)
*** PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.
Flanged ends available in DIN/EN PN10.

CV Series Profile2™ Proportional Control Ball Valves

1/2" TO 6" PVC AND CPVC

KEY FEATURES

- PVC and CPVC
- Reversible Seats
- True Union Design
- Manual or Actuated
- Precise Flow Control

OPTIONS

- Fill Station Lines
- Lateral Take-Off Line Flow Control
- Flow Reduction in Systems with Oversized Pumps
- Control Flow from Tanks

SELECTION CHART

SIZE***	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2", 3/4", 1" and 2" (DN15, DN20, DN25 and DN50)	PVC or CPVC	Socket and Threaded or Flanged**	FPM or EPDM	250 PSI @ 70°F 17 Bar @ 21°C Non-Shock
2-1/2" – 4" (DN63 – DN100)		Socket, Threaded or Flanged**		235 PSI @ 70°F 16 Bar @ 21°C Non-Shock
6" (DN150)		Flanged		150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* 4" valve venturied to 6" ** All flanged valves are rated to 150 PSI @ 70°F Non-Shock (10 Bar @ 21°C)
*** PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.
Flanged ends available in DIN/EN PN10.





TW Series Three-Way True Union Ball Valves

1/2" TO 6" PVC AND CPVC

KEY FEATURES

- PVC and CPVC
- Position Indicator
- Easily Actuated
- PTFE Seats
- FPM or EPDM O-Rings
- Double O-Ring Stem Seal

OPTIONS

- Lockouts Available
- Pneumatic and Electric Actuators
- Cross-Flow Ball
- NT Ball
- TP Ball

SELECTION CHART

SIZE**	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 4" (DN15 – DN100)	PVC or CPVC	Socket, Threaded or Flanged	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
6** (DN150)		Flanged		

* 4" valve venturied to 6"
** PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21. Flanged ends available in DIN/EN PN10.

LA Series Lateral Three-Way True Union Ball Valves

1/2" TO 6" PVC AND CPVC

KEY FEATURES

- PVC and CPVC
- PTFE Seats
- FPM or EPDM O-Rings
- Double O-Ring Stem Seal
- Simplifies Lateral Connections
- Replaces Valve/Tee Connection Combinations
- Quick, Easy to Install
- Replacement for Zero Dead-Leg Valves

OPTIONS

- Lockouts Available
- Pneumatic and Electric Actuators



SELECTION CHART

SIZE**	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 4" (DN15 – DN100)	PVC or CPVC	Socket and Threaded or Flanged	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
6** (DN150)		Flanged		

* 4" valve venturied to 6"
** PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21. Flanged ends available in DIN/EN PN10.



QV Series QIC2™ Compact Ball Valves

1/2" TO 2" PVC

KEY FEATURES

- Gray PVC
- Rugged, Compact and Lightweight Design
- Full Port Design
- PTFE Seats
- EPDM O-Ring Seals
- Low Torque, Easy 1/4-Turn Operation
- No Integral Parts to Replace
- Perfect for OEM Requirements

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 2" (DN15 – DN50)	PVC	Socket and Threaded	EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

Valve-Safe Lockouts

FOR BALL VALVES UP TO 6"

KEY FEATURES (A)

- For Ball Valves up to 6"
- Latches and Lockable in Open/Close Position
- Simple Trigger Mechanical Design
- Can Use with Lockout/Tagout Hasp

KEY FEATURES (B)

- PP Housing Material
- For All Ball Valves up to 6"
- Use with up to 3 Padlocks





TBB Series Commercial True Union Ball Valves

1/2" TO 4" PVC, CPVC, PP AND PVDF

KEY FEATURES

- PVC, CPVC, PP and PVDF
- Full Port Design
- FPM or EPDM Seals
- PTFE Seats
- Double O-Ring Stem Seals
- Adjustable Seat Retainer

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 4" (DN15 – DN100)	PVC, CPVC, PP or PVDF	Socket, Threaded or Flanged*	FPM or EPDM	225 PSI @ 70°F 15 Bar @ 21°C Non-Shock
			FPM	

* All flanged valves are rated to 150 PSI @ 70°F Non-Shock (10 Bar @ 21°C)

QTA Series Commercial True Union Compact Ball Valves

1/2" TO 2" PVC

KEY FEATURES

- Gray and White PVC
- True Union End Connections
- Rated at a Full 150 PSI
- Santoprene® (TPV) Seats
- EPDM O-Ring Seals
- No Internal Parts to Replace
- Low Torque Easy 1/4-Turn Operation
- Perfect for OEM Applications
- Socket and Threaded Connections



SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 2" (DN15 – DN50)	PVC (Gray or White)	Socket and Threaded	EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

QVC Series Commercial Compact Ball Valves

1/2" TO 4" PVC

KEY FEATURES

- Gray and White PVC
- Compact and Lightweight Design
- Low Torque Easy 1/4-Turn Operation
- Santoprene® (TPV) Seats
- EPDM O-Ring Seals
- No Internal Parts to Replace

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 4" (DN15 – DN100)	PVC (Gray or White)	Socket or Threaded	EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock



SW Series Swing Check Valves

3" TO 6" PVC, CPVC AND GFPP AND 8" PVC AND GFPP



KEY FEATURES

- PVC, CPVC and GFPP
- High Temperature/ Pressure Ratings
- Two-In-One Seal Design
- Built-In Flange Seals
- Two Drain Ports
- Self-Aligning Clapper Seals
- High Cv Rating and Full Flow Design

SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
3" – 6" (DN80 – DN150)	PVC, CPVC or GFPP	Flanged	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
8" (DN200)	PVC or GFPP			

* Flanged ends available in DIN/EN PN10.

WCV Series Full Pattern Wafer Check Valves

2" TO 8" PVC AND CPVC

KEY FEATURES

- Robust Full Pattern Body
- PVC and CPVC
- No Special Spacers or Flanges Required
- High Cv Rating Equal to Metal Check Valves, Saves on Energy and Pump Wear
- FPM or EPDM Gasket and Face Seal
- One-Piece Disc and Shaft Design

- Designed for ANSI150 and PN10 Flanges
- Patent No. 8,887,757

OPTIONS

- 316 Stainless Steel or Hastelloy® Disc Spring



SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	O-RING	SPRING	PRESSURE RATING
2" – 8" (DN50 – DN200)	PVC and CPVC	Wafer	FPM or EPDM	316 SS, Hastelloy®	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* Consult factory on DN100 Size

WC Series Wafer Check Valves

2" TO 8" PVDF AND 10" TO 20" PVC, PP AND PVDF

KEY FEATURES

- PVC, PP and PVDF Body and Disc
- FPM, EPDM or PTFE O-Ring Seats
- Compact and Lightweight
- Easy Installation
- Vertical or Horizontal Operation

OPTIONS

- Spacers
- Stainless Steel or Hastelloy® Disc Springs*



* Valve shown with spring option

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	O-RING	SPRING	PRESSURE RATING
2" – 6" (DN50 – DN150)	PVDF	Wafer	FPM, EPDM or PTFE*	316 SS, Hastelloy®	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
8" (DN200)					100 PSI @ 70°F 7 Bar @ 21°C Non-Shock
10" – 12" (DN250 – DN300)	PVC, PP or PVDF				90 PSI @ 70°F 6 Bar @ 21°C Non-Shock
14" – 16" (DN350 – DN400)					Consult with Factory

TC Series True Union Ball Check Valves

1/4" TO 3/8" PVC, 1/2" TO 2" PVC, CPVC AND PP AND 2-1/2" TO 6" PVC AND CPVC



KEY FEATURES

- PVC, CPVC and PP
- For Horizontal or Vertical Installation
- 1/2" to 6" are Sure Block Design
- Square Cut Seat for Positive Sealing
- Seats with Minimum Back Pressure
- 1/4" and 3/8" are Trim Check Design

OPTIONS

- Foot Valve Screens



1/4" - 4"
PVC and CPVC

SELECTION CHART

SIZE****	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/4" - 3/8" (DN8 - DN10)	PVC	Socket or Threaded	FPM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
1/2" - 2" (DN15 - DN50)	PVC or CPVC	Socket and Threaded or Flanged**	FPM or EPDM	235 PSI @ 70°F 16 Bar @ 21°C Non-Shock
	PP**	Threaded or Socket Fusion		
2-1/2" - 4" (DN63 - DN100)	PVC or CPVC	Socket, Threaded or Flanged	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
6" (DN150)		Flanged		

* Trim Checks ** 2" PP is rated to 100 PSI @ 70°F Non-Shock *** 4" valve venturied to 6"
 **** All flanged valves are rated to 150 PSI @ 70°F Non-Shock
 ***** PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21. PP socket fusion ends per ASTM F2389 and threaded ends per BS21. Flanged ends available in DIN/EN PN10.

YC Series Y-Check Valves

1/2" TO 4" PVC AND CPVC



KEY FEATURES

- PVC and CPVC
- Full Flow Design
- Minimum Pressure Drop
- PVC Coil to Guide Piston to a Positive Seat
- Minimal Back Pressure Required to Seat Piston

OPTIONS

- Drilled Cap for Easy Drainage
- True Union End Connections



SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" - 4" (DN15 - DN100)	PVC or CPVC	Socket, Threaded, Flanged or True Union	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.

SLC Series Spring-Loaded Y-Check Valves

1/2" TO 4" PVC



KEY FEATURES

- PVC
- Full Flow Design
- Closes with No Back Pressure
- Adjustable - Opens From 2 to 15 PSI
- Easy Maintenance
- Opens in Any Position

OPTIONS

- True Union End Connections



SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" - 4" (DN15 - DN100)	PVC	Socket, Threaded or True Union	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.

BYV Series Butterfly Valves

2" TO 12" PVC, CPVC AND GFPP



NSF

PVC/EPDM 2"-12"
CPVC/EPDM 4"-12"

KEY FEATURES

- One-Piece Body and Disc in PVC, CPVC and GFPP Materials
- Revolutionary Hand Lever with 19 Lockable Stop Positions and 360° Interlock
- External Disc Position and Flow Indication
- Hydro-dynamic Centric Disc Design for Increased Flow Performance
- Over-Sized Liner Face Maximizes Surface Contact with Flanges
- EPDM, Viton® or Nitrile Liners

- One-Piece 316 Stainless Steel Stem with Threaded Retaining Gland
- Stem Bearing and Seal Retainer for Absolute Stem Positioning and Sealing
- ISO 5211 Top Flange and Stem Drive
- All Sizes Meet ANSI B16.10 / ISO 5752 Narrow Face-to-Face Dimensions
- Fits ANSI 150 or PN10 Flange Patterns

OPTIONS

- Over-Molded 316 Stainless Steel Lugs
- Gear Operators
- Complete Range of Pneumatic or Electric Actuators
- Stem Extensions
- 2" Square Operating Nut
- Chain Operator for Gear Box
- Titanium or Hastelloy Stems

SELECTION CHART

SIZE	BODY MATERIAL	DISC MATERIAL	LINERS	PRESSURE RATING
2" – 12" (DN30 – DN300)	PVC, CPVC or GFPP	PVC, CPVC or GFPP	Viton®, EPDM or Nitrile	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

BYB Series Large Diameter Butterfly Valves

14" TO 24" PVC, CPVC, PP AND PVDF



KEY FEATURES

- PVC, CPVC, PP and PVDF Bodies
- CPVC, PP and PVDF Discs
- Heavy Duty Gear Operator
- 410 Grade Stainless Steel Stem
- Choice of FPM, EPDM or Nitrile Liners

OPTIONS

- Pneumatic or Electric Actuators
- Stem Extensions

SELECTION CHART

SIZE	BODY MATERIAL	DISC MATERIAL	LINERS	PRESSURE RATING
14" – 16" (DN350 – DN400)				86 PSI @ 70°F 6 Bar @ 21°C Non-Shock
18" (DN450)	PVC, CPVC, PP or PVDF	CPVC, PP or PVDF	FPM, EPDM or Nitrile	72 PSI @ 70°F 5 Bar @ 21°C Non-Shock
20" – 24" (DN500 – DN600)				51 PSI @ 70°F 3 Bar @ 21°C Non-Shock

BYCN/BYCS Series Butterfly Valves

2" TO 8" PVC



NSF

BYCN 2" – 8"

KEY FEATURES

- Distinctive Ergonomic Handle with Lockout Feature
- Wafer Body Design
- Fits ANSI 150 or PN10 Flange Patterns
- PVC Body with PVC Disc

- One-Piece Stainless Steel Stem 316 Grade for BYCN/410 Grade for BYCS
- ISO 5211 Mounting Pad
- NSF/ANSI-61 Listed (BYCN 2" – 8")

OPTIONS

- Gear Operators
- Pneumatic or Electric Actuators

SELECTION CHART

SERIES	SIZE	BODY MATERIAL	DISC MATERIAL	STEM MATERIAL	LINERS	PRESSURE RATING
BYCN	2" – 8" (DN50 – DN200)	PVC	PVC	316 Grade Stainless Steel	EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
BYCS				410 Grade Stainless Steel		

DAB Series True Union Diaphragm Valves

1/2" TO 2" PVC AND CPVC



KEY FEATURES

- PVC and CPVC
- Position Indicator
- Sure-Grip Handwheel
- Choice of FPM, EPDM or PTFE Diaphragms*

OPTIONS

- Electric or Pneumatic Actuation
- PVDF Vapor Barrier**

* All PTFE diaphragms are EPDM backed
 ** PVDF Vapor Barrier available with EPDM and PTFE diaphragm only

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	DIAPHRAGM	SEALS	PRESSURE RATING
1/2" – 2" (DN15 – DN50)	PVC or CPVC	Socket and Threaded	FPM, EPDM or PTFE*	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* EPDM and PTFE diaphragms are available with a PVDF Vapor Barrier

DAB Series Flanged Diaphragm Valves

1/2" - 6" PVC AND 1/2" - 4" CPVC



KEY FEATURES

- PVC and CPVC
- Position Indicator
- Sure-Grip Handwheel
- Choice of FPM, EPDM or PTFE Diaphragms*

OPTIONS

- Pneumatic or Electric Actuation to 4"
- Over 4" Actuation, Consult Factory
- PVDF Vapor Barrier**

* All PTFE diaphragms are EPDM backed
 ** PVDF Vapor Barrier available with EPDM and PTFE diaphragm only

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	DIAPHRAGM	PRESSURE RATING
1/2" – 4" (DN15 – DN100)	PVC	Flanged	FPM, EPDM or PTFE*	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
6" (DN150)				75 PSI @ 70°F 5 Bar @ 21°C Non-Shock
1/2" – 4" (DN15 – DN100)	CPVC			150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* EPDM and PTFE diaphragms are available with a PVDF Vapor Barrier

LHB Series Manual Limit Switch

FOR BALL VALVES UP TO 6" AND BUTTERFLY VALVES UP TO 8"

KEY FEATURES

- Now Available with "Dead-Man" Spring Return Handle or Handlever (LHB-SR)
- Remote Monitoring of Critical Services
- Retrofits to Existing Valves
- Robust GFPP Body, Cover and Plate
- 304 Stainless Steel Stem and FPM Seals
- Fits All Hayward® Ball Valves up to 6" and Butterfly Valves up to 8"
- Two Adjustable SPDT 10 Amp at 120 VAC Switches (Open/Close Position)
- 1/2" Conduit Port
- Terminal Blocks for Ease of Wiring
- Meets ISO5211, F05, F07 and F10 Patterns
- NEMA 4X
- Switches CSA Listed
- Patent No. 9,010,721 and 9,010,722

OPTIONS

- Additional Two Switches
- Potentiometer Available
- Optional Handles – Lever or T-Handle
- LED for Open/Close Indication



LHB



SELECTION CHART

MANUAL LIMIT SWITCH MODEL	VALVE SIZE/SERIES
LHB-1/LHB-1-SR	1/2" – 2"/TB (DN15 – DN50) • 1-1/2" – 4"/BW (DN40 – DN100)
LHB-2/LHB-2-SR	2-1/2" – 6"/TB (DN65 – DN150) • 6" – 8"/BW (DN150 – DN200)

SV Series True Union Solenoid Valves

1/4" TO 1" PVC AND CPVC



KEY FEATURES

- PVC and CPVC
- Corrosion-Resistant Polyester Coil
- No Pressure Differential Required for Operation
- Both 1/2" Conduit or SJ-Type Cord Electrical Connection
- 110 VAC Standard

OPTIONS

- 12 VAC, 24 VAC, 220 VAC, 12 VDC, 24 VDC

OPERATING PARAMETERS

For optimum valve performance, inlet pressure must not exceed 120 PSI. Flow velocity must not exceed 5 ft. per second.

SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/4", 1/2", 3/4", 1" (DN8 – DN25)	PVC or CPVC	Socket and Threaded	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.

EA Series Automated True Union Ball Valves

1/2" TO 2" PVC AND CPVC



VALVE FEATURES

- PVC and CPVC
- EPDM Seals
- PTFE Seats
- Full Port Design
- Fully Serviceable
- Double O-Ring Stem Seals

ACTUATOR FEATURES

- UL/CSA Listed Motor
- Thermoplastic NEMA 4/4X Enclosure
- 2.5 Second, 90° Cycle Time
- Thermal Overload Protection
- Permanently Lubricated Gear Train
- Actuator Brake
- No Need for Manual Adjustments
- Blind Leads Connection
- Standard 120 VAC
- Unidirectional, Not Reversing

SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	VALVE PRESSURE RATING
1/2" – 2" (DN15 – DN50)	PVC or CPVC	Socket and Threaded	EPDM	250 PSI @ 70°F 17 Bar @ 21°C Non-Shock

* PVC and CPVC socket ends to ISO 727-1 and threaded ends to BS21.

EAU Series Automated True Union Ball Valves

1/2" TO 2" PVC AND CPVC



VALVE FEATURES

- PVC and CPVC
- FPM or EPDM Seals
- PTFE Seats
- Full Port Design
- Fully Serviceable
- Double O-Ring Stem Seals

ACTUATOR FEATURES

- UL/CSA Listed Motor
- Thermoplastic NEMA 4/4X Enclosure
- 2.5 Second, 90° Cycle Time
- Permanently Lubricated Gear Train
- Actuator Brake
- 90 or 180° Operation
- Unidirectional, Not Reversing
- Terminal Block Connections
- Standard 120 VAC
- End of Travel Dry Contact Limit Switch
- Thermal Overload Protection
- Lightweight, Compact and Inexpensive

SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	VALVE PRESSURE RATING
1/2" – 2" (DN15 – DN50)	PVC or CPVC	Socket and Threaded	FPM or EPDM	250 PSI @ 70°F 17 Bar @ 21°C Non-Shock

* PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.

ECP Series Automated True Union Ball Valves

1/2" TO 6" PVC AND CPVC



VALVE FEATURES

- PVC and CPVC
- FPM or EPDM Seals
- PTFE Seats
- Full Port Design
- Fully Serviceable
- Double O-Ring Stem Seals

ACTUATOR FEATURES

- Ideal for Corrosive Atmosphere and Environments
- Corrosion-Resistant GFPP Housing
- LED Status Light
- Anti-Condensation Heater
- Manual Override
- Position Indicator
- 4 SPDT Micro Limit Switches
- Namur-Style Solenoid Mounting
- Stainless Steel Fasteners 303 SS
- 100% Factory Tested
- CE Mark

SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	VALVE PRESSURE RATING
1/2" – 6" (DN15 – DN50)	PVC or CPVC	Socket and Threaded	FPM or EPDM	250 PSI @ 70°F 17 Bar @ 21°C Non-Shock

* PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.

PM Series Automated True Union Ball Valves

1/2" TO 2" PVC AND CPVC



VALVE FEATURES

- PVC and CPVC
- FPM or EPDM Seals
- PTFE Seats
- Full Port Design
- Fully Serviceable
- Double O-Ring Stem Seals

ACTUATOR FEATURES

- Corrosion-Resistant Thermoplastic Housing
- Permanently Lubricated Gear Train
- Two-Piston Rack and Pinion Design
- Namur-Style Mounting
- Position Indicator
- Lightweight
- Air-to-Air (Double Acting) or Spring Return

SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	VALVE PRESSURE RATING
1/2" – 2" (DN15 – DN50)	PVC or CPVC	Socket and Threaded	FPM or EPDM	250 PSI @ 70°F 17 Bar @ 21°C Non-Shock

* PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.



PMD/PMS Series Pneumatic Actuators

FOR BALL VALVES UP TO 4"

KEY FEATURES

- Corrosion-Resistant Thermoplastic Housing
- Permanently Lubricated Gear Train
- Two-Piston Rack and Pinion Design
- Namur-Style Mounting
- Position Indicator
- Lightweight
- ISO 5211 Mounting Base

OPTIONS

- PMD Double Acting Air-to-Open and Close
- PMS Air-to-Spring Fail-Safe Operation
- Solenoid Valves with Optional Voltage
- Auxiliary Limit Switch
- Cycle Speed Controls



SPECIFICATIONS

HOUSING: Polyamide
OUTPUT SHAFT: Stainless Steel
MINIMUM AIR PRESSURE: 80 PSI
MAXIMUM AIR PRESSURE: 120 PSI
SEALS: Nitrile
CYCLE TIME: Half Second, Typical
AIR PORT CONNECTIONS: 1/4" NPT

GFPP PMD4/PMS4 Series Pneumatic Actuators

FOR BALL AND BUTTERFLY VALVES UP TO 4"

KEY FEATURES

- Ideal for Corrosive Atmosphere and Environments
- Available in Double Acting and Spring Return Designs (Butterfly Valves up to 3")
- Corrosion-Resistant GFPP Housing
- Anodized Aluminum Two-Piston Rack and Stainless Steel Pinion
- Position Indicator
- Permanent Lubrication
- Lightweight – Easy for Installation
- Namur-Style Solenoid Mounting
- ISO 5211 Mounting Base
- Stainless Steel Fasteners
- Alternative Operating Media for 40 PSI to 120 PSI
- All Units are Marked for Traceability
- 100% Factory Tested

OPTIONS

- Double Acting Air-to-Open and Close
- Solenoid Valves with Optional Voltages
- Auxiliary Limit Switch
- Cycle Speed Controls



SPECIFICATIONS

HOUSING:	GFPP per ASTM D4101 Cell Class 85580
OUTPUT SHAFT:	303 Stainless Steel per ASTM A314
SEALS:	Nitrile
MINIMUM AIR PRESSURE:	80 PSI
MAXIMUM AIR PRESSURE:	120 PSI
CYCLE TIME:	Half Second, Typical
AIR PORT CONNECTIONS:	1/4" NPT
NAMUR MOUNTING:	VDI/VDE 3845
OPERATING TEMPERATURE RANGE:	-4°F to 176°F

PCD/PCS Series Pneumatic Actuators

FOR BALL AND BUTTERFLY VALVES UP TO 24"



KEY FEATURES

- For All Sizes of Ball and Butterfly Valves
- Four-Piston Rack and Pinion Design
- Compact, Lightweight
- Position Indicator
- Namur-Style Solenoid Mounting
- Adjustable Travel Stops
- ISO 5211 Mounting Base

OPTIONS

- PCD Double Acting Air-to-Open and Close
- PCS Spring Return Fail-Safe Operation
- Solenoid Valves
- Positioners
- Auxiliary Limit Switches
- Cycle Speed Controls

SPECIFICATIONS

HOUSING:	Epoxy-Coated Aluminum
OUTPUT SHAFT:	Plated Steel
MINIMUM AIR PRESSURE:	80 PSI
MAXIMUM AIR PRESSURE:	120 PSI
CYCLE TIME:	Less Than One Second, Typical
AIR PORT CONNECTIONS:	1/4" NPT

EAU Series Electric Actuators

FOR BALL VALVES UP TO 2"

KEY FEATURES

- UL/CSA Listed Motor
- Thermoplastic NEMA 4/4X Enclosure
- 2.5 Second, 90° Cycle Time
- Permanently Lubricated Gear Train
- Actuator Brake
- 90 or 180° Operation
- Unidirectional, Not Reversing
- Terminal Block Connections
- Standard 120 VAC
- End of Travel Dry Contact Limit Switch
- Thermal Overload Protection
- Lightweight, Compact and Inexpensive

OPTIONS

- Voltage Options of 12, 24 or 220 VAC and 12 or 24 VDC



SPECIFICATIONS

HOUSING:	GFPP
OPERATION:	Unidirectional
CONDUIT SIZE:	1/2"
DUTY CYCLE:	25%
CYCLE TIMES:	2-1/2 Seconds, 90° Rotation; 5 Seconds, 180° Rotation
ENCLOSURE:	NEMA 4/4X
VOLTAGE:	120 VAC
THERMAL OVERLOAD PROTECTION MECHANICAL BRAKE MOTOR:	UL Listed
AUXILIARY LIMIT SWITCHES:	One

ECP Series Glass Filled Polypropylene Electric Actuators

FOR BALL VALVES 1/2" - 6"
AND BUTTERFLY VALVES 2" - 6"

KEY FEATURES

- Ideal for Corrosive Atmosphere and Environments
- Corrosion-Resistant GFPP Housing
- LED Status Light
- Anti-Condensation Heater
- Manual Override
- Position Indicator
- 4 SPDT Micro Limit Switches
- Lightweight - Easy for Installation
- Namur-Style Solenoid Mounting
- ISO 5211 Mounting Base
- Stainless Steel Fasteners 303 SS
- 100% Factory Tested
- CE Mark

OPTIONS

- Digital Positioner 0-20mA, 4-20mA or 0-10V

SPECIFICATIONS

HOUSING:	GFPP (Glass Filled Polypropylene) per ASTM D4101 Cell Class 85580
OPERATION:	1/4 Turn
DUTY RATING:	75%
ENCLOSURE:	NEMA 4/4X
PROTECTION:	IP-67
VOLTAGE:	Single Phase 120/230V and 12/24V
OUTPUT SHAFT:	303 Stainless Steel per ASTM A314



HZSN1 Series On/Off/Proportional Electric Actuators

FOR BALL VALVES UP TO 6"

KEY FEATURES

- Equipped with Two (2) Volt-Free Form A Auxiliary Switches Rated at up to 1A 250VAC (on/off models only)
- Proportional Models have 4-20mA or 2-10vdc Feedback Output Standard
- ISO5211 Compliant with an 11mm Double Square Female Drive
- Furnished with a 39" (1m) Cable to Facilitate Field Connections Outside the Compact Enclosure
- Low Profile Visual Position Indicator and Three Flush Mounted LEDs Allow At-A-Glance Position Indication
- Manual Override Lever and 8mm Access Shaft at the Bottom of the Actuator Housing
- NEMA 4X/IP67 Compliant
- PG6 EMT Entry Port with Sealed Cable Gland

OPTIONS

- Power Supply Flexibility – 24 VAC / VDC, 120 VAC and 230 VAC



SPECIFICATIONS

OPERATION:	Reversing
FIELD CONNECTION:	1M flying lead pre-wired though PG6 Polyamide gland
DUTY CYCLE:	75% on/off & proportional models, all voltages
CYCLE TIME:	11~13 seconds 90° @ rated torque
ENCLOSURE:	NEMA 4X / IP67 Aluminum Alloy, w/ Electrostatic coating
VOLTAGES:	24vac/vdc, 120vac, 230vac
CONTROL:	On/off & 4-20mA/2-10vdc in/out
THERMAL OVERLOAD PROTECTION:	Current limited, BDC motor
MECHANICAL OVERRIDE:	Declutchable lockout lever with socket drive
VISUAL INDICATORS:	Low profile visual position, power and end of travel status LED's

HRS Series On/Off/Proportional Electric Actuators

FOR BALL VALVES UP TO 6" AND BUTTERFLY VALVES UP TO 24"



KEY FEATURES

- Extended Product Range from 300 in-lb to 177,000 in-lb
- Powder Coated Aluminum Alloy Housing
- ISO5211 Compliant Mounting with Double Square Drive Socket
- On/Off or Proportional Control (2-10 vdc / 4-20mA Inputs & Outputs)
- NEMA 4/4X/IP67 Environmental Rating
- Multiple AC and DC Voltages
- Integrated Local Control Stations
- Visual Position Indicators
- CSA Certified to CSA 22.2 No. 139-10 UL439 for Ordinary Location Applications

OPTIONS

- Interchangeable ISO5211 Mounting and Drive Shafts
- Positioners
- Extended Duty Motors
- 3 Position Control
- Passive Analog Feedback
- Torque Switches
- 3 Phase Motor Control Center
- IP68 Submersible Rating

SPECIFICATIONS

OPERATION:	Reversing
CONDUIT ENTRY:	HRSN2 – (2) ½" NPT, furnished with Polyamide cable glands HRSN3 and larger – (2) ¾" NPT, furnished with Polyamide cable glands
DUTY CYCLE:	HRSN2~4, 75% on/off & proportional models, 24v HRSN2~4, 25% on/off 120/1, 230/1, 3 phase HRSN2~4, 75% on/off 120/1, 230/1, (extended duty) HRSN2~4, 75% proportional 120/1, 230/1, 3 phase HRSN5~6, 25% on/off 120/1, 230/1, 3 phase HRSN5~6, 75% on/off 120/1, 230/1, (extended duty) HRSN5~6, 50% proportional 120/1, 230/1, 3 phase HRSN7, 25% on/off 3 phase only HRSN7, 50% proportional 3 phase only
CYCLE TIMES:	8~129 seconds 90° @ DC/60Hz depending on model
ENCLOSURE:	NEMA 4X / IP67 Aluminum Alloy / Cast Iron w/ Electrostatic coating
VOLTAGES:	12vac/vdc, 24vac/vdc, 120vac, 230vac, 230/3~480/3, depending on model
CONTROL:	On/off & 4-20mA/2-10vdc in/out
THERMAL OVERLOAD PROTECTION:	Low voltage: Class B Thermal self-resetting High voltage: Class F Thermal self-resetting
MECHANICAL OVERRIDE:	HRSN2A, 2R manual override shaft, bottom mounted HRSN2B, 2S Manual override Handwheel, push to engage HRSN3 and larger, clutchless full time manual handwheel
VISUAL INDICATORS:	Raised or Low profile visual position, depending on model

RV Series Pressure Relief Valves

1/2" TO 2" PVC AND CPVC



KEY FEATURES

- PVC and CPVC
- Hand Adjustable, No Tools Needed
- Integrally Molded Threaded Gauge Port
- Pressure Relief from 5 PSI to 75 PSI

OPTIONS

- 0 to 30 PSI Gauge
- 0 to 60 PSI Gauge
- 0 to 160 PSI Gauge
- Gauge Guards
- 2 to 20 PSI for 1-1/2" to 2" with Low Pressure Spring
- Flanged Ends

SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 2" (DN15 – DN50)	PVC or CPVC	Threaded or Flanged	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* Available with threaded ends to BS21.

PR Series Pressure Regulator Valves

1/4" TO 1-1/2" PVC AND CPVC



KEY FEATURES

- PVC and CPVC
- Hand Adjustable, No Tools Needed
- Integrally Molded Threaded Gauge Port
- Regulates from 5 to 75 PSI
- Prevents Downstream Pressure from Exceeding the Set Pressure

OPTIONS

- 0 to 30 PSI Gauge
- 0 to 60 PSI Gauge
- 0 to 160 PSI Gauge
- Gauge Guards
- Flanged Ends

SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	PRESSURE SETTING	PRESSURE RATING
1/4" – 1-1/2" (DN8 – DN40)	PVC or CPVC	Threaded or Flanged	FPM	5 to 75 PSI	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* Available with threaded ends to BS21.

PBV Series Back Pressure Valves

1/2" TO 2"



KEY FEATURES

- PVC, CPVC, PP or PVDF Body, and Noryl™ Molded Dome
- PTFE/EPDM Diaphragm
- Spring: 10 – 150 psi (Spring pre-set: 50 psi)
- 304 Stainless Steel Bolting
- FNPT Threads
- Anti-Siphon Function
- Adjustment Screw with Slot
- PVC, CPVC and PVDF rated to 250 psi @ 70°F/17.2. Bar at 21°C, PP rated to 150 psi @ 70°F/10 Bar at 21°C

OPTIONS

- ANSI or DIN/EN Threaded, Socket, True Union Socket or Flanged End Connections
- 0 - 50 psi and 10 - 250 psi Springs
- PTFE/FPM Diaphragm

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	DIAPHRAGM	PRESSURE RATING
1/2"-2"	PVC, CPVC, PP, PVDF	FNPT, Socket, Flange, TU Socket	PTFE/EPDM	10-150 psi, 0-50, 10-250

RPV Series Pressure Relief Valves

1/2" TO 2"



KEY FEATURES

- PVC, CPVC, PP or PVDF Body, and Noryl™ Molded Dome
- PTFE/EPDM Diaphragm
- Spring: 10 – 150 psi (Spring pre-set: 50 psi)
- 304 Stainless Steel Bolting
- FNPT Threads
- Adjustment Screw with Slot
- PVC, CPVC and PVDF rated to 250 psi @ 70°F/17.2. Bar at 21°C, PP rated to 150 psi @ 70°F/10 Bar at 21°C

OPTIONS

- 2-port/90o
- ANSI or DIN/EN Threaded, Socket, True Union Socket or Flanged End Connections
- 0 - 50 psi and 10 - 250 psi Springs
- PTFE/FPM Diaphragm

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	DIAPHRAGM	PRESSURE RATING
1/2"-2"	PVC, CPVC, PP, PVDF	FNPT, Socket, Flange, TU Socket	PTFE/EPDM, PTFE/FPM	10-150 psi, 0-50, 10-250

CCS Series Calibration Cylinders/Columns

100 - 20000ML



KEY FEATURES

- NPT connections
- High Contrast Graduation Markings
- Direct GPH and mL readout
- Clear Easy-View Tube
- Sealed Top with Overflow Connection (Vent)
- Pressure rated to 15 psi @ 70°F/1.03 Bar at 21°C

OPTIONS

- Dust Cover or EZ Clean (glass cylinder only)
- BSPT, Socket, Flange, Flange with Ball Valve or True Union End Connections

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	PRESSURE RATING
100 - 20000ml	PVC, Borosilicate glass	1/2-1" FNPT	15 psig

IV Series Injection Valves/IQ Series Injection Quills

VALVE AND QUILL SIZES 1/2" TO 1"



KEY FEATURES

- Built-In Ball Check Valve with Hastelloy C Spring, with the IV Check being Rebuildable
- Threaded MNPT End Connections
- FPM O-Ring Seals
- 45° Bevel on Quill Tip
- Pressure Rated to 150 psi @ 70°F

OPTIONS

- Flat Tip
- BSPT or Socket End Connections
- EPDM O-Ring Seals

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	DIAPHRAGM	PRESSURE RATING
1/2" - 1" (DN15 - DN20)	PVC, CPVC, PVDF	BSPT or Socket	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

CS Series Corporation Stops

SIZES 1/2" TO 1"



KEY FEATURES

- True Union Thermoplastic Ball Valve with PTFE Seats
- All Thermoplastic Injection Quill with Beveled Tip
- 316SS Locking Chain and Hardware
- Variable and Customer Injector Lengths
- Standard MNPT and Threaded True Union End Connections
- Pressure Rated to 150 psi @ 70°F/10 Bar at 21°C

OPTIONS

- Flat Tip
- Socket True Union, Metric Socket or BSPT Threaded End Connections
- EPDM O-Ring Seals
- Optional Ball Check Valve with FPM O-rings

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	DIAPHRAGM	PRESSURE RATING
1/2" - 1" (DN15 - DN20)	PVC or CPVC	Socket True Union, Metric Socket or BSPT Threaded	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

AV Series Angle Globe Valves

1/4" TO 2" PVC



KEY FEATURES

- PVC
- Space Saving 90° Body
- Panel Mount Lugs on 1/4" Size
- Fine Pitch Stem Threads for Precision Adjustment
- Reliable Globe Valve Design
- Perfect for Throttling and Changing Flow Direction

SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/4" – 2" (DN8 – DN50)	PVC	Threaded or Flanged	FPM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* Available with threaded ends to BS21.

NVA Series Needle Valves

1/4" TO 1/2" PVC, CPVC, GFPP AND PVDF



KEY FEATURES

- Available in PVC, CPVC, GFPP and PVDF
- Integrated Stem/PTFE Seat Design
- Flanges for Panel Mounting
- NPT Threaded Ends
- Accurate Flow Control
- Fine Pitch Stem Threads for Precise Adjustment
- Adjust Flow Rates Down to Drops per Minute
- Ideal for Metering Flow
- Patent Pending

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/4" – 1/2" (DN8 – DN15)	PVC, CPVC, GFPP or PVDF	Threaded	FPM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

LC Series Universal Stopcock™

1/4" PVC



KEY FEATURES

- PVC
- Six End Connections in One Package
- EPDM Seat and Seals
- Hex Wrench Included for End Connection Installation
- NSF/ANSI 61 Listed

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/4" (DN8)	PVC	FPT x FPT FPT x MPT FPT x Hose MPT x MPT MPT x Hose Hose x Hose	EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

FPT = female pipe thread, MPT = male pipe thread

YS Series Y-Strainers

1/2" – 2" PVC, CPVC* AND CLEAR PVC,
2-1/2" – 4" PVC / 3" - 4" CPVC



KEY FEATURES

- PVC, CPVC and Clear PVC
- Threaded, Socket or True Union Connection
- Horizontal or Vertical Installation
- FPM O-Ring Seals
- 2:1 Open Area Ratio
- Hex Cap for Easy Access to Screen
- Standard Screen Has 1/32" Perforation

OPTIONS

- Stainless Steel Perf or Mesh Strainer Screens Available in Various Sizes

SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 1" (DN15 – DN25)	PVC, CPVC or Clear PVC	Socket, Threaded or True Union	FPM and EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
1-1/4" (DN32)	PVC and Clear PVC			
1-1/2" (DN40)	PVC, CPVC or Clear PVC			
2" (DN50)	PVC			
2-1/2" (DN63)	PVC	Socket, Threaded, Flanged or True Union	FPM and EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
3" – 4" (DN80 – DN100)	PVC and CPVC			

* PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21. Flanged ends available in DIN/EN PN10.

SB Series Simplex Basket Strainers

1/2" TO 4" PVC, CPVC, GFPP AND EASTAR®



PVC and CPVC

KEY FEATURES

- PVC, CPVC, GFPP and Eastar®
- True Union
- Ergonomic Hand Removable Cover
- In-Line or Loop Connections
- External Cover Threads
- Integral Flat Mounting Bases
- PVC or CPVC Baskets Standard
- NSF/ANSI 61 Listed

OPTIONS

- Stainless Steel, Monel®, Hastelloy® and Titanium Strainer Baskets
- Pressure Differential Gauge and Switch
- Baskets Available with Perforated or Mesh Liners

SELECTION CHART

SIZE**	MATERIAL	END CONNECTION*	SEALS	PRESSURE RATING
1/2" – 4" (DN15 – DN100)	PVC or CPVC	Socket, Threaded or Flanged	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
	Eastar®*			100 PSI @ 70°F 7 Bar @ 21°C Non-Shock
	GFPP	Socket Fusion, Threaded or Flanged	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock	

* End Connections and assembly nuts are PVC
** PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21. PP socket fusion ends per ASTM F2389 and threaded ends per BS21. Flanged ends available in DIN/EN PN10.

SB Series Simplex Basket Strainers

6" TO 8" PVC AND CPVC



PVC and CPVC

KEY FEATURES

- PVC and CPVC
- Ergonomic Hand Removable Cover
- In-Line or Loop Connections
- External Cover Threads
- Integral Flat Mounting Bases
- PVC or CPVC Baskets Standard

OPTIONS

- Stainless Steel, Monel®, Hastelloy® and Titanium Strainer Baskets
- Pressure Differential Gauge and Switch
- Baskets Available with Perforated or Mesh Liners

SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
6" – 8" (DN150 – DN200)	PVC or CPVC	Flanged	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

DB Series Duplex Basket Strainers

1/2" TO 4" PVC, CPVC AND EASTAR®

KEY FEATURES

- PVC, CPVC and Eastar®
- Ergonomic Hand Removable Cover
- Uninterrupted Flow
- No System Shutdown for Basket Cleaning
- In-Line or Loop Piping
- Integral Flat Mounting Bases
- External Cover Threads
- Hand Removable Vents on Covers
- Hand Removable Drains on Bodies
- Liquid Displacing Covers

OPTIONS

- Stainless Steel, Monel®, Hastelloy® and Titanium Strainer Baskets
- Pressure Differential Gauge and Switch
- Pneumatic or Electric Valve Automation



SELECTION CHART

SIZE**	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 4" (DN15 – DN100)	PVC or CPVC	Socket, Threaded or Flanged	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
	Eastar®*			100 PSI @ 70°F 7 Bar @ 21°C Non-Shock

* End Connections and assembly nuts are PVC

** PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21. Flanged ends available in DIN/EN PN10.

DB Series Duplex Basket Strainers

6" TO 8" PVC AND CPVC

KEY FEATURES

- PVC and CPVC
- Ergonomic Hand Removable Cover
- Uninterrupted Flow
- No System Shutdown for Basket Cleaning
- In-Line or Loop Piping
- Integral Flat Mounting Bases
- External Cover Threads
- Hand Removable Vents on Covers
- Hand Removable Drains on Bodies
- Liquid Displacing Covers

OPTIONS

- Stainless Steel, Monel®, Hastelloy® and Titanium Strainer Baskets
- Pressure Differential Gauge and Switch
- Pneumatic or Electric Valve Automation



SELECTION CHART

SIZE*	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
6" – 8" (DN150 – DN200)	PVC or CPVC	Flanged	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* Flanged ends available in DIN/EN PN10.

FLV/CFLV Series Simplex Bag and Cartridge Filters

SINGLE AND DOUBLE LENGTH

KEY FEATURES

- Platinum GFPP Material
- One-Piece Injection Molded Construction
- Hand Removable Ergonomic Cover with Liquid Displacing Dome
- Vent Valve on Cover
- In-Line or Loop Configuration
- Drain Port at Bottom
- Integral Mounting Base

OPTIONS

- Vent Gauge with Gauge Guard
- Pressure Differential Gauge and Switch
- EPDM Seals
- Cartridge Adapters - CFLV only

SELECTION CHART

SIZE*	MATERIAL	END CONNECTIONS	PIPING SIZES	SEALS	FLOW RATE	PRESSURE RATING
Single Length 7" x 16"	GFPP	GFPP (Threaded and Flanged), PVC/CPVC (Socket and PP Socket Fusion)	1-1/4" – 2" (DN32 – DN50)	FPM or EPDM	100 GPM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
Double Length 7" x 32"			2-1/2" – 4" (DN65 – DN100)		150 GPM	

* PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.
PP socket fusion ends per ASTM F2389 and threaded ends per BS21.
Flanged ends available in DIN/EN PN10.



FLV/CFLV Series Duplex Bag and Cartridge Filters

SINGLE AND DOUBLE LENGTH

KEY FEATURES

- Platinum GFPP Material
- One-Piece Injection Molded Construction
- Hand Removable, Ergonomic Cover with Liquid Displacing Dome
- Vent Valve Included on Cover
- True Union Socket, Threaded or Flanged End Connections
- In-Line or Loop Flow Configurations
- Drain Port at Bottom
- Integral Mounting Base

OPTIONS

- Vent Gauge with Gauge Guard
- Pressure Differential Gauge and Switch
- EPDM Seals
- Cartridge Adapters - CFLV only
- Triplex and Other Multiple Assemblies Available upon Request

SELECTION CHART

SIZE*	MATERIAL	END CONNECTIONS	PIPING SIZES	SEALS	FLOW RATE	PRESSURE RATING
Single Length 7" x 16"	GFPP	CPVC (Socket, Threaded or Flanged)	2" (DN50)	FPM or EPDM	100 GPM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
Double Length 7" x 32"			2-1/2" – 4" (DN65 – DN100)		150 GPM	

* PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.
PP socket fusion ends per ASTM F2389 and threaded ends per BS21.
Flanged ends available in DIN/EN PN10.



FLV Series PVC & CPVC Bag Filters

PVC AND CPVC

KEY FEATURES

- True Union End Connections - Socket, Threaded or Flanged
- Hand Removable, Ergonomic Cover with Liquid Displacing Dome
- Vent Valve Included On Cover
- Rated up to 100 GPM
- In-Line or Loop Flow Configurations
- Solid 1-Piece Basket
- Drain Port at Bottom
- Integral Mounting Base

OPTIONS

- Pressure Gauge with Gauge Guard
- Pressure Differential Gauge and Switch
- EPDM Seals
- Duplex Configurations



SELECTION CHART

SIZE	MATERIAL	END CONNECTIONS	PIPING SIZES	SEALS	FLOW RATE	PRESSURE RATING
Single Length 7" x 16"	PVC or CPVC	Socket, Threaded or Flanged	1-1/4" - 2" (DN32 - DN50)	FPM or EPDM	100 GPM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
Double Length 7" x 32"			2-1/2" - 4" (DN65 - DN100)			

* PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.
PP socket fusion ends per ASTM F2389 and threaded ends per BS21.

LS Series Aquatic Sand Filter

KEY FEATURES

- Ideal for Sensitive Aquatic Environments or Salt Water Systems
- All Wetted Hardware Manufactured from 316 Stainless Steel
- Corrosion Resistant Thermoplastic Housing and Base
- Durable Flanged Inspection Cover
- Integral Top Diffuser
- Efficient, Multilateral Underdrain Assembly
- Integral Molded Drain Plug

OPTIONS

- LS Aquatic 6-Way Multiport Valve



SPECIFICATIONS

FILTER TYPE:	High-Rate Sand : No. 2 Silica Sand (0.45 mm - 0.55 mm)
FILTER TANK:	Spherical, Molded High Density Polyethylene
UNDERDRAIN:	360° Self-Cleaning Slotted Laterals, Precision Installed in Ball-Joint Assembly
CONTROL VALVE:	LS Aquatic 6-Way Multiport Valve
SUPPORT BASE:	Injection Molded ABS
PERFORMANCE RANGE:	99 to 130 GPM (375 to 492 LPM)
PORT SIZE:	2" NPT
PRESSURE RATING:	50 PSI @ 70°F Non-Shock
DIMENSIONS:	LS311SX - 31" W x 38 5/8" H (787 mm x 981 mm) LS360SX - 36" W x 46" H (914 mm x 1168 mm)

Heavy-Duty Filter Bags

PP NEEDLE FELT, POLYESTER NEEDLE FELT, PP MESH OR NYLON MESH 1 TO 800 MICRON RATINGS



KEY FEATURES

- Thermoplastic Ring Seal
- Thermoplastic Flange Seal
- Heavy Duty Sewn or Welded Construction
- Silicone-Free

OPTIONS

- Custom Filter Bags for Most Applications

SELECTION CHART

SIZE	MATERIAL	CONSTRUCTION	SEAL MATERIAL/TYPE	MICRON RATINGS	TEMPERATURE RATINGS
7" x 16" at 90 GPM or 7" x 32" at 180 GPM	PP Needle Felt	Sewn	PP RING	1, 5, 10, 25, 50, 100, 200	200°F
		Welded	PP FLANGE		
	Polyester Needle Felt	Sewn	PP RING		300°F
		Welded	PP FLANGE		300°F
	PP Mesh	Sewn	PP RING		200°F
	Nylon Mesh	Sewn	PP RING	150, 400, 600, 800	325°F



Cartridge Filter Adapter Kits Option

KEY FEATURES

- Polypropylene Construction
- For Single or Multiple up to 5 Cartridges
- Accommodates Melt Blown, Spun or Pleated Cartridges
- Adapters for Single Length and Double Length CFLV's
- Adapters are designed to work with DOE and 222 End Connectors (where applicable)
- Simple Install of Adapter and Cartridges
- Access Top Plate Allows for Effortless Removal of Cartridges

Pleated Filter Cartridges

HIGH CAPACITY/EFFICIENCY

KEY FEATURES

- Multiple Micron Ratings for High Efficiency Filtration
- For use with Single (7" diameter) and Multiple (2-1/2" diameter) Cartridge CFLVs (Single and Double Length)
- High Surface Area Design Provides Excellent Flow Rates and Comprehensive Service Life
- Thermally Bonded DOE End-Caps, Core and Filter Media
- Low Pressure Drop
- Multiple Layered Media Construction Guarantees Dependable Performance



A Series LifeStar® VS Aquatic Pump

2 HP



KEY FEATURES

- Ideal for Sensitive Aquatic Environments or Salt Water Systems
- Multi-Position or Detachable / Wall Mount Digital Control Interface with Password Protection
- All Wetted Hardware Manufactured from 316 Stainless Steel
- Silicon Carbide/Silicon Carbide Shaft Seal Suitable for Fresh and Salt Water Use
- Corrosion Resistant Housing
- Self-Priming Pump
- Suitable For High Volume Pumping
- Clear High Capacity Basket Strainer Lid for Visual Inspection
- Elevated Base Ensures Better Ventilation and Protection from Flooding
- Perforated HDPE Basket

SPECIFICATIONS

PUMP HOUSING:Glass Filled Polypropylene
CONNECTIONS:2" True Union Socket
MOTOR SHAFT:303 SS (Non-Wetted)
SHAFT FACE SEAL:Silicon Carbide/Silicon Carbide
SHAFT SECONDARY SEAL:EPDM
ALL WETTED HARDWARE:316 SS (Impeller Insert, Impeller Screw and 2 Diffuser Screws)
MAIN HOUSING GASKET:EPDM
MOTOR BOLTS:316 SS
HOUSING BOLTS:316 SS
MOTOR:Single Phase - Totally Enclosed Fan Cooled (TEFC)
HP RATING:2
STRAINER BASKET:HDPE , 1/8" Perf
SERVICE FACTOR:1.35
VOLTAGE SUPPLY:230V, 60 Hz

A Series LifeStar® Aquatic Pump

1/2, 3/4, 1, 1-1/2, 2, 3, 5 HP



Single Phase/Three Phase -
ODP MOTOR

Three Phase -
TEFC MOTOR

KEY FEATURES

- Ideal for Sensitive Aquatic Environments or Salt Water Systems
- All Wetted Hardware Manufactured from 316 Stainless Steel
- Silicon Carbide/Silicon Carbide Shaft Seal Suitable for Fresh and Salt Water Use
- Corrosion Resistant Housing
- Self-Priming Pump
- Suitable for High Volume Pumping
- Clear High Capacity Basket Strainer Lid for Visual Inspection
- Elevated Base Ensures Better Ventilation and Protection from Flooding
- Perforated HDPE Basket

SPECIFICATIONS

PUMP HOUSING:Glass Filled Polypropylene
CONNECTIONS:2" True Union Socket
MOTOR SHAFT:303 SS (Non-Wetted)
SHAFT FACE SEAL:Silicon Carbide/Silicon Carbide
SHAFT SECONDARY SEAL:EPDM
ALL WETTED HARDWARE:316 SS (Impeller Insert, Impeller Screw and 2 Diffuser Screws)
MAIN HOUSING GASKET:EPDM
MOTOR BOLTS:316 SS
HOUSING BOLTS:316 SS
MOTORS:Single Phase/Three Phase - Open Drip Proof (ODP)Three Phase - Totally Enclosed Fan Cooled (TEFC)
HP RATINGS:1/2, 3/4, 1, 1-1/2, 2, 3 and 5 (ODP)
STRAINER BASKET:HDPE , 1/8" Perf

T Series Vertical Seal-Less Immersible Pumps

1/3, 1/2, 3/4, 1 AND 1-1/2 HP



KEY FEATURES

- CPVC, GFPP and PVDF
- Single, Non-Coupled Motor Shaft 303 SS
- Proprietary, Patent Pending PTFE Shaft Seal
- Extended Shaft Sleeve
- Solid, Stable One-Piece Shaft
- Seal Point Away from Weep Hole
- Less Vibration
- Runs True

OPTIONS

- Optional Inlet Screen
- In-Tank Filtration
- Impeller Trim Variations
- Explosion-Proof Motors
- Wash-Down Motors
- 575V Motors

SPECIFICATIONS

PUMP:	CPVC, GFPP or PVDF Construction
PIPE CONNECTIONS:	Threaded NPT
MOTOR SHAFT:	303 SS
SHAFT SEAL:	Patent Pending PTFE Shaft Seal
PERFORMANCE:	Flow rates from 5 to 80 GPM with TDH's up to 45 feet
MOTORS:	Single or Three Phase Motors
MODELS WITH HP RATINGS:	T2 1/3 HP, T4 1/2 HP, T5 3/4 HP, T6 1 HP, T7 1 HP and T8 1-1/2 HP

S Series Vertical Seal-Less Immersible Pumps

1/15, 1/3, 1/2, 3/4, 1, 1-1/2, 3 AND 5 HP



KEY FEATURES

- Heavy Duty Design for Continuous Duty Service
- Seal-Less Design
- No Seals to Leak or Replace
- PTFE Fume Barrier
- FPM Seals
- Optional Inlet Screens

OPTIONS

- Optional Inlet Screen and Extended Shaft
- CPVC Inlet Screens
- Impeller Trim Variations
- Explosion Proof Motors
- Washdown Motors
- 575V Motors
- EPDM Seals
- S-J Type Electrical Cord

SPECIFICATIONS

PUMP:	CPVC (1/15 – 5 HP), Natural PP (1/15 HP), GFPP (1/3 – 1-1/2 HP) and PVDF (1/15 – 1-1/2 HP)
PIPE CONNECTIONS:	Threaded NPT
FUME BARRIER:	PTFE, Protects Motor and Bearings from Corrosion Damage
O-RINGS:	FPM
PERFORMANCE:	Flow Rates from 5 to 130 GPM with TDHs up to 115 Feet
MOTORS:	Single or Three Phase Motors; HP Ratings of 1/15, 1/3, 1/2, 3/4, 1, 1-1/2, 3 and 5HP
MODELS WITH HP RATINGS:	S1 1/15, S2 1/3, S4 1/2, S5 3/4, SS6 3/4, SS7 1, S8 1-1/2, S12 3 and S16 5 HP

D Series Vertical Seal-Less Immersible Pumps

1/8 HP



KEY FEATURES

- CPVC, Natural PP and PVDF
- No Seals to Leak or Replace
- PTFE Fume Barrier
- FPM Seals
- Optional Inlet Screens

OPTIONS

- Inlet Screens
- EPDM O-Ring Seals
- Impeller Trim Variations
- Explosion Proof Motors
- Washdown Motors
- 575V Motors
- S-J Type Electrical Cord

SPECIFICATIONS

PUMP:	CPVC, PP or PVDF Construction
PIPE CONNECTIONS:	Threaded
O-RINGS:	FPM
FLOW RATES:	From 2 to 17 GPM with TDHs up to 18 Feet
MOTORS:	Single-Phase Motor; 1/8 HP; 115/230 VAC, 50/60 Hz

R Series Magnetic Drive Pumps

1/3, 1/2, 3/4, 1, 1-1/2, 2, 3 AND 5 HP



KEY FEATURES

- GFPP and Carbon Reinforced ETFE
- Low Friction Operation
- Easy Maintenance, No Special Tools
- Seal-Less Design

OPTIONS

- Carbon Bushings
- Ceramic Bushings
- EPDM Seals
- 575V Motors
- Washdown Motors

SPECIFICATIONS

PUMP:	GFPP or ETFE Construction
PIPE CONNECTIONS:	Threaded NPT or Flanged ANSI 150#
SHAFT:	Large Diameter, Ceramic with PTFE, Impeller Bushing
PERFORMANCE:	Flow Rates from 5 to 140 GPM with TDHs of up to 141 Feet
MOTORS:	Single or Three Phase Motors; HP Ratings of 1/3, 1/2, 3/4, 1, 1-1/2, 2, 3 or 5 HP; 115/230 VAC or 208-230/460 VAC, 50/60 Hz
MODELS WITH HP RATINGS:	RC03 1/3, RX05 1/2, RX07 3/4, RX10 1, RX15 1-1/2, RX20 2, RX30 3 and RX50 5 HP

C Series Centrifugal Pumps

1/3, 1 AND 1-1/2 HP



KEY FEATURES

- Rugged Design for Demanding Continuous Duty Service
- No Metal in Contact with Process Fluid
- Carbon/Ceramic Seals
- FPM Seals
- Impeller Trim Variations
- PTFE/Ceramic Seals
- PTFE/Carpenter 20 Seals
- EPDM Elastomers
- Waterflushed Seals
- 575V Motors
- Washdown Motors

SPECIFICATIONS

PUMP:	CPVC, GFPP or PVDF Construction
PIPE CONNECTIONS:	Threaded
SHAFT:	Stainless Steel with Non-Metallic Sleeve
SEAL:	John Crane External Type 21 or Equal Carbon/Ceramic Seal Faces with Stainless Steel Hardware and FPM Elastomers
PERFORMANCE:	Flow rates from 5 to 83 GPM with TDH's up to 70 feet
MOTORS:	Single or Three Phase Motors; HP Ratings of 1/3, 1 and 1-1/2; 115/230 VAC or 208-230/460 VAC
MODELS WITH HP RATINGS:	C5 1/3, C7 1 and C8 1-1/2 HP

In-Tank Filtration Systems

COMPATIBLE WITH D AND S SERIES IMMERSIBLE PUMPS

These highly efficient filtration systems are compatible with D and S Series Immersible Pumps.

KEY FEATURES

- CPVC Corrosion-Resistant Construction
- Compact and Easy to Install
- Seal-Less, Bearing-Free Pump
- Fast Filter Change
- 1/15 HP Model Features a Built-in Power Cord

OPTIONS

- Double Filter



Z Series Solenoid Diaphragm Metering Pumps

ANALOG INTERFACE

KEY FEATURES

- PVDF Wetted End, PTFE Diaphragm, Ceramic Double Ball Checks
- Multi-Voltage Motor
- Complete Kit Includes PVDF Foot Valve, PVDF Injection Valve and Required Tubing
- NEMA 4X Protection Class (IP 65)
- Three Sizes Available (100, 200 & 500)*
- Built-In Degassing Valve on 100 and 200 Sizes
- Optional Liquid Level Switch and Flow Switch
- Optional Multi-Function Valve for Over-Pressure and Back Pressure Control

*Refer to Page 40 for Specifications

ANALOG MODELS

ZMA	ZPA	ZTA
Constant Dosage	Proportional Dosage	Timed Dosage
Two Frequency Ranges	Analog Input (4-20mA)	Low Level Alarm
Low Level Alarm	Pulse Multiplier/Divider	



Z Series Solenoid Diaphragm Metering Pumps

DIGITAL INTERFACE

KEY FEATURES

- PVDF Wetted End, PTFE Diaphragm, Ceramic Double Ball Checks
- Multi-Voltage Motor
- Complete Kit Includes PVDF Foot Valve, PVDF Injection Valve and Required Tubing
- NEMA 4X Protection Class (IP 65)
- Three Sizes Available (100, 200 & 500)*
- Built-In Degassing Valve on 100 and 200 Sizes
- Intuitive LCD Display Provides Pump and Set-Up Information
- Optional Liquid Level Switch and Flow Switch
- Optional Multi-Function Valve for Over-Pressure and Back Pressure Control

*Refer to Page 40 for Specifications

DIGITAL MODELS

ZPD	ZRD	ZKD
Proportional Dosage	Built-in pH/ORP Controller	Timed Dosage
Analog Input	pH/ORP Electrode Connection	Programmable Timed Relay
Pulse Input	Analog Output of Readings	



HLS Series

ADVANCED SUBMERSIBLE PRESSURE LEVEL TRANSMITTER

KEY FEATURES

- Unaffected by Surface Foaming, Waves or Headspace Vapors
- All CPVC Housing
- Al₂O₃ (Alumina) Diaphragm
- Triple Sealed Cable Entry into Body
- Available with FPM or EPDM Seals
- Available with 0-15 ft or 0-33 ft of Level Range
- 30 and 50 ft FEP Coated Cable Standard (Lengths to 1000 Feet Available)
- 10-35 VDC Powered
- Direct Analog 4-20mA Output Signal
- 0.25% Accuracy Full Scale
- Laser Etched Sensor Details on Body
- Full Range of Accessories Available



SPECIFICATIONS

DIMENSIONS L x DIA.:	5.8" Long x 1.25" Dia. (14.7 cm Long x 3.1 cm Dia.)
RANGE:	0-15 ft (6.5 psi) and 0-33 ft (14.3 psi) of Water Column
STANDARD CABLE LENGTH:	30 ft with the 0-15 ft Level Sensor; 50 ft with the 0-33 ft Level Sensor
CABLE:	Vented, 4 Conductor, FEP Cover
TEMPERATURE:	30°F (Non-Freezing) to 140°F
TEMPERATURE EFFECTS:	+/- 1.5% TEB (Total Error Band = Linearity+Hysteresis+Repeatability +Zero and Span Settings+Temperature Effects)
POWER REQUIREMENT:	10-35 VDC
OUTPUT SIGNAL:	4-20 mA, Scaled for Full Sensor Range
BODY:	CPVC per ASTM D1784, Cell Classification 23447

TLF Series

PRESSURE LEVEL JUNCTION BOX

KEY FEATURES

- Suitable for all HLS and TL Series Level Sensors
- Glass Reinforced Polypropylene Housing for High Impact Resistance
- NEMA 4X Enclosure
- Threaded Polyethylene 2" NPT Process Connection
- Two Cord Grips: Sensor In, Signal Out
- Built-in Breather with Nomex Membrane
- Weather Resistant
- Easy Installation with Hayward Bulkhead Fittings



HLST Series

INDICATING LEVEL TRANSMITTER

KEY FEATURES

- Highly Accurate and Remote Level Indication
- Level Reading in Feet, Inches & Meters
- 1/4 DIN cutout, IP65 Protection (front)
- PT100/1000 Temperature input on 2nd Channel
- Dual Analog Outputs
- Dual Programmable 5A Relays
- Dual Programmable Open Collectors
- Configurable, Large LCD Display
- Simple, Intuitive Set-Up
- Removable Terminals for Easy Wiring

SPECIFICATIONS

ACCURACY:	±0.2%
INPUT 1:	-4-20mA, two or three wire, powered
INPUT 2:	PT100/PT1000 RTD
RELAYS:	Two x 5A, 250V, Programmable
OPEN COLLECTORS:	Two, Programmable
DISPLAY:	128 x 128 Pixel LDC
POWER:	100-240 VAC/50-60 Hz... 12-32 VDC Available upon Request
DIMENSIONS:	92 x 92 x 57.3 mm
WEIGHT:	0.9 lbs/0.4 kg
OPERATING TEMPERATURE:	4° to 122°F (-10° to 50°C)
PROTECTION:	Face IP65/NEMA 4X



TF Series

MULTI-FUNCTION TRUE UNION PADDLEWHEEL FLOW METER



KEY FEATURES


- Available in PVC and PP Materials— PVC and Polypropylene
- True Union Design 1/2" - 2" (Flanged 3" & 4", PVC Only)
- High Accuracy— Less than $\pm 1.0\%$ of Full Scale
- Easy Installation – No Insertion Fittings Require
- High Flow Range 0.33 ft/s – 32.8 ft / 0.3 m/s – 10 m/s
- Pulse on All Models, Totalizer and 4-20mA Available
- Easy to Configure, 'K' Factor Pre-set
- Large Bright LED Digital Display
- Horizontal or Vertical Installation
- NEMA 4X/IP65 Enclosure

SPECIFICATIONS

FLUID:	Water or Chemicals Liquid – Viscosity Range: 5-20 centistokes
ACCURACY:	($\pm 1.0\%$ of F.S. @ 20°C (68°F) – Repeatability $\pm 0.5\%$ of Full Scale
FLOW VELOCITY:	Flow Range - 0.33 to 32.8 FPS (8 FPS Max recommended)
PRESSURE RATING:	150 psi / 10 Bar at 70°F / 23°C Non-Shock
MATERIAL OF CONSTRUCTION:	Paddle: Tefzel / Body: PVC or PP Shaft: Zirconium Ceramic Seals: EPDM/FPM
OPERATING TEMPERATURE:	PVC: 32°F to 140°F (60°C), PP 20°F to 176°F (80°C)
PROTECTION CLASS:	IP65 NEMA 4X
MIN FLOW:	1/2" = 0.2 GPM, 3/4" = 0.5 GPM, 1" = 1 GPM, 1-1/2" = 1.5 GPM, 2" = 5.5 GPM

TFT Series

INSERTION PADDLEWHEEL FLOW METER WITH TRANSMITTER

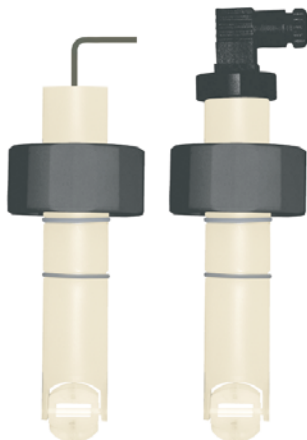

KEY FEATURES

- Chemical-resistant Materials PP or PVDF Body, PFA Paddle and Ceramic Shaft and Bearing
- Pipe Size Range 1/2" -24" / DN15 - DN600
- Measuring Flow Range (0.33 to 32.8 ft/s)*
- Excellent for Low or High Temperatures, -4°F to 194°F (-25°C to 90°C)
- NEMA 4X / IP65 or NEMA 6 / IP68 Rating
- Zirconium Dioxide Ceramic Shaft & Bearings
- Double O-ring Seal
- 26 Foot Cable or DIN Connector
- Fits into Industry-standard Insertion Tees
- Insertion Tees and Clamp-on Saddles Available

* Max. recommended velocity for plastic pipe is 8 ft/s

SPECIFICATIONS

MEASURING ACCURACY:	$\pm 0.75\%$ of full scale
REPEATABILITY:	$\pm 0.5\%$ of full scale
PIPE SIZE:	1/2" to 4" / DN15 to DN100 (-0) 6" to 24" / DN150 to DN600 (-1)
OUTPUT FREQUENCY:	60.5 Hz per m/s nominal, 18.45 Hz per ft/s nominal
OUTPUT SIGNAL:	Proportional Pulse (STD), 0-5 VDC (OPT)
SENSOR BODY MATERIAL:	Polypropylene or PVDF
ROTOR MATERIAL:	PFA
SHAFT & BEARINGS MATERIAL:	Zirconium Dioxide Ceramic (ZrO ₂)
O-RING MATERIAL:	FKM
ELECTRICAL CONNECTION:	DIN Mini-Connector 43650-A (IP65) Electrical Cable (IP68)
CABLE TYPE:	3 conductor + shield 0.26A WG.PVC

TLV Series

FLOW DISPLAY, TOTALIZER, BATCHER AND TRANSMITTER

KEY FEATURES

- Pulse or 4-20mA Input, Depending on Model
- 2 Relay, 4-20mA + 1 Relay Output Models Available
- 120 VAC Powered, Provides 24 VDC Output
- Display of Instantaneous Flow Rate and the Total Flow Values
- Batching and Counting of Doses
- Simple Installation

ACCESSORIES

- IR Remote Controller IRC-20

SPECIFICATIONS

POWER SUPPLY/ POWER CONSUMPTION:	85 - 260 VAC
DISPLAY:	LED, 6 x 13 mm high, 8 levels of adjustable brightness
INPUT:	Pulse or Current: 0-20 mA or 4-20 mA
ACCURACY:	0.1% @ 70°C + One Digit, (for 0 - 20 mA range)
OUTPUT (OPTION):	2 Relays or 1 Relay + 4-20mA
POWER SUPPLY OUTPUT:	24 VDC +5%, -10% / max. 100 mA, stabilized
OPERATING TEMPERATURE:	4°F - 158°F (-20°C - 70°C)
PROTECTION CLASS:	NEMA 4X



TLC Series

LEVEL PROCESS DISPLAY

KEY FEATURES

- 4-20mA Input Indicating Transmitter in NEMA 4X Enclosure
- Input: 4-20 mA
- 2 Relay (1A or, 4-20mA + 1 Relay Models Available, 4 or 6 Digit Displays Available)
- 120 VAC Powered, Provides 24 VDC Power to Level Sensors
- RS-485/Modbus RTU Standard
- Signal Peak Value Detection
- 3 Wire Cord Grips Included

ACCESSORIES

- IR Remote Controller*



SPECIFICATIONS

POWER SUPPLY/	
POWER CONSUMPTION:	85–260 VAC/VDC
DISPLAY:	LED, 3/4" 4-Digit, Red, Adjustable Brightness
INPUT:	0-20 mA or 4-20 mA
ACCURACY:	0.1% @ 25°C + One Digit
OUTPUT:	2 Relays or 1 Relay + 4-20mA
POWER SUPPLY OUTPUT:	24 VDC
COMMUNICATION INTERFACE:	RS-485
OPERATING TEMP:	-4°F – 158°F (-20°C - 70°C)
PROTECTION CLASS:	NEMA 4X (IP65)

* Remote controller is not part of the device and is available as an option.

TLM Series

INDUSTRIAL PANEL MOUNT LEVEL TRANSMITTER

KEY FEATURES

- Large Bright LED Display
- NEMA 4X Face
- Adjustable Display Brightness
- 4-20mA Output with Either 2 or 4 Relays Depending on Model
- Acoustic Signal (Beep)
- Input Signal 4-20 mA
- 4-digit LED Display
- 120 VAC Powered, Provides 24 VDC Output to Power Level Sensors
- Communication Interface RS-485 (Modbus RTU Optional)
- Configurable Relays (1 amp)
- Standard Dimensions for Retrofit Applications
- Optional NEMA 4X Enclosure Available



VSA Series

INDUSTRIAL VISUAL/AUDIBLE SENTRY ALARM SYSTEM

KEY FEATURES

- High Intensity Red Alarm Light
- 90 dB Audible Alarm with External Test-Silence-Normal Positions
- Rugged NEMA 4X Industrial Design Enclosure
- Latching Lockable Cover (No Screws Required)
- External Mounting Feet Installs in Minutes
- High Impact All Thermoplastic Polycarbonate Shell
- Small Foot Print – Compact Design
- Excellent Chemical Resistance
- Includes 6 ft Power Cord + Seal-tight Cord Connector

SPECIFICATIONS

DIMENSIONS:	7" x 5" x 4.5"
ENCLOSURE:	NEMA 4X
WEIGHT:	2.1 lbs.
VOLTAGE/FREQ/AMPS:	120v/60 Hz/1 Amp
INPUT POWER:	100v – 240v



GG Series Gauge Guards

1/4" x 1/4" PVC, CPVC AND PP AND 1/4" x 1/2" PVC, CPVC AND PVDF



KEY FEATURES

- PVC, CPVC, PP and PVDF
- Threaded NPT Connections
- FPM Membrane
- All Thermoplastic, No Rust or Corrosion
- No Metal Fasteners
- Rugged, Low Profile, Compact Design
- Work in Any Position
- Large Volume Gauge Guard Available

OPTIONS

- 0 to 30 PSI Gauge
- 0 to 60 PSI Gauge
- 0 to 160 PSI Gauge
- 0 to 160 PSI SS Liquid Filled Gauge and Liquid Damped

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/4" x 1/4" (DN8 - DN8)	PVC, CPVC or PP	Threaded	FPM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
1/4" x 1/2" (DN8 - DN15)	PVC, CPVC or PVDF			

GA Series Pressure Gauge & Isolator

ALL THERMOPLASTIC PRESSURE GAUGE AND ISOLATOR

KEY FEATURES

- Ideal for corrosive environments and applications
- One-piece Molded Design (No Assembly)
- Heavy Duty Construction
- Completely Corrosion Resistant
- Extra Large Colored Display
- Factory Pre-filled Glycerin / Vacuum Sealed
- No Filling Required
- Suitable for Corrosive Media + Slurries
- Simple Installation
- Calibration Certified
- Self-flushing Gauge Guard Design

SPECIFICATIONS

DIAL DIAMETER:	Large 2-1/2" (Big Numbers-Clear Markers)
MOUNTING:	Direct Mount, Bottom Connection FNPT 1/2"
HOUSING:	PVDF or Polypropylene with PTFE or FPM Diaphragm
LENS:	Safety Glass
DIAL:	Red/Black Scale White Background, dial arc 270°
MEASURING PRINCIPLE:	Bourdon Tube-316 SS (Non Wetted) Diaphragm (Wetted Part) – FPM (Standard)
MOVEMENT:	316 SS (Non Wetted)
GAUGE:	Red, Yellow, Green Moveable Plastic Markers Pressure Range Pointers Fitted on the Bezel
CONNECTION:	1/2" FNPT
FILLING:	Options: Glycerin or Silicone Filled
ACCURACY:	±1.5% F.S.
OPERATING TEMPERATURE:	Max. Working Temp. PVDF-195°F, PP-170°F
PRESSURE RANGE:	Standard Range 0-60 / 0-100 / 0-160 psi



PP VERSION

GDS Series

DOUBLE SIDED PRESSURE GAUGE AND ISOLATOR

KEY FEATURES

- All Thermoplastic *Double Sided* Gauge
- Heavy Duty Rugged Design
- Corrosion Resistant PP or PVDF Bodies
- Ideal for Visual Pressure Alert for Change-out or Bag Replacement
- Extra Large Colored Display
- High Accuracy of 1.5%
- Factory Pre-filled Glycerin / Vacuum
- No Filling Required
- One-piece Molded Design (No Assembly)
- Suitable for Corrosive Media + Slurries
- Self-flushing Gauge Guard Design

SPECIFICATIONS

DIAL DIAMETER:	Large 2-1/2" (Big Numbers-Clear Markers)
MOUNTING:	Direct Mount, Bottom Connection FNPT 1/2"
HOUSING:	PVDF or Polypropylene with PTFE or FPM Diaphragm - One-piece Molded Design (No Assembly or Filling Required)
LENS:	Safety Glass
DIAL:	Red/Black Scale White Background, dial arc 270°
MEASURING PRINCIPLE:	Bourdon Tube-316 SS (Non Wetted) Diaphragm (Wetted Part) – FPM (Standard)
MOVEMENT:	316 SS (Non Wetted)
GAUGE:	3 Adjustable Plastic Markers-Pressure Range Pointers fitted on the Bezel (Green, Yellow, Red)
FILLING:	Glycerin Filled
ACCURACY:	±1.5% F.S.
OPERATING TEMPERATURE:	Max. Working Temp. PVDF-195°F / 90°C,
TEMPERATURE:	PP 170°F, PVDF 195°F
PRESSURE RANGE:	Standard Range 0-60 / 0-100 / 0-160 psi (Second Scale: Bar) Other units available, e.g., MPa, etc.



PP VERSION

GD Series Digital LED Pressure Alarm

IDEAL FOR BASKET STRAINERS & BAG FILTER MONITORING

KEY FEATURES

- LED Display Changes from Green to Red to Indicate Alarm Condition
- Highly Accurate $\pm 0.25\%$ of Full Scale
- Ceramic Diaphragm, T316SS 1/2" MNPT Process Connection
- Display Pressure Units psi, Bar, Kg/Cm2, KPA, MPA, In Hg
- Two 3 Amp Relays
- 4-20 mA Analog Output
- Digital RS-485 Interface Function (optional)
- NEMA 4X Design, IP65
- Adjustable Range
- Lockable Software Security



SPECIFICATIONS

SUPPLY VOLTAGE:DC 14 to 30 V	DIAPHRAGM MATERIALS:Ceramic Al ₂ O ₃
MEASURING ACCURACY:0.25% Full Scale	PRESSURE PORT MATERIALS:316 SS
ANALOG OUTPUT:4-20 mA	DISPLAY MATERIALS:Polyamide 66+ 15% Glass Filled
DISPLAY:Bright Red/Green LED High (0.4')	OPERATING TEMPERATURE RANGE: ..-4°F to 176°F (-20°C to 80°C)
PARAMETER SETTING:Push Button	PRESSURE RANGE:0 to 400 psi

GLD Series LED Pressure Gauge & Isolator

ALL THERMOPLASTIC PRESSURE INDICATOR WITH INTEGRAL ISOLATOR

KEY FEATURES

- All Thermoplastic Construction (Gauge + Isolator)
- Heavy Duty One-piece Molded Design (No Assembly Required)
- No Filling Required
- Corrosion Resistant
- Designed to Act as Visual Pressure Alert for Bag/Filter Change-Out
- Extra Large LED Display
- No Programming Required (LCD Version)
- PTFE Diaphragm Standard
- High Accuracy $\pm 1.0\%$
- Suitable for Corrosive Media & Slurries
- 15 ft of Cable for LED Model
- Simple Installation
- Self-flushing Gauge Guard Design



PP VERSION

SPECIFICATIONS

DIAL DIAMETER:2-1/2"	OPERATING TEMPERATURE:Max. Working Temp. PVDF-195°F / 90°C, PP-170°F / 76°C
MOUNTING:Direct Mount, Bottom Connection 1/2" FNPT	PRESSURE RANGE:0-290 psi (Ambient Temp)
HOUSING:PVDF or Polypropylene with PTFE Diaphragm	OUTPUT:4-20mA + Two Open Collectors (NPN or PNP)
PROTECTION CLASS:NEMA 4X	POWER REQUIREMENT:10-30 VDC for LED
LENS:Polycarbonate	
DIAL:LED	
ACCURACY: $\pm 1.0\%$	

BFAS Series Bulkhead Fittings – Standard Flange

1/2" TO 4" PVC, CPVC AND PP



1/2" – 3"
PVC/EPDM

KEY FEATURES

- PVC, CPVC and PP
- FPM or EPDM Gasket Seal
- Left-Hand Threads
- Buttress Threads Protect Against Blowout
- Hex Body for One-Person Installation
- Rated at 150 PSI

OPTIONS

- Vacuum Breaker
- Ready Flanges (for Making Flanged Connections to Tanks)
- Tank-Tite™

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 4" (DN15 – DN100)	PVC	Socket x Thread Thread x Thread	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
	CPVC	Socket x Thread		
	PP	Thread x Thread		

BFA Series Bulkhead Fittings – Standard Flange

1/2" TO 6" PVC, CPVC AND PP – LONG PATTERN



PVC/EPDM

KEY FEATURES

- PVC, CPVC and PP
- Extra Long Design for Thick Tank Walls
- Left-Hand Threads
- Rated at 150 PSI
- FPM or EPDM Gasket Seal
- Hex Body for One-Person Installation
- Full Buttress Threads

OPTIONS

- Vacuum Breaker
- Ready Flanges (for Making Flanged Connections to Tanks)
- Tank-Tite™

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 6" (DN15 – DN150)	PVC	Socket x Socket Socket x Thread	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
	CPVC	Thread x Thread		
	PP	Thread x Thread		

BFA Series Bulkhead Fittings – Oversized Flange

1/2" TO 1" PVC, CPVC AND PP – LONG PATTERN



KEY FEATURES

- PVC, CPVC and PP
- Oversized Flange Base
- Extra Long Design for Thick Tank Walls
- Left-Hand Threads
- Rated at 150 PSI
- FPM or EPDM Gasket Seal
- Hex Body for One-Person Installation
- Full Buttress Threads

OPTIONS

- Ready Flanges (for Making Flanged Connections to Tanks)
- Tank-Tite™

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 1" (DN15 – DN25)	PVC	Socket x Socket Socket x Thread	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
	CPVC	Thread x Thread		
	PP	Thread x Thread		

Tank Adapter Fittings

1/2" TO 4" GFPP - THREAD X THREAD



KEY FEATURES

- Short Pattern/Barrel Design
- All Glass Filled Polypropylene Construction
- EPDM Gasket Seal
- Rated to 150 PSI @ 70°F Non-Shock
- Excellent Temperature and Abrasive Properties
- Left Handed Threads
- Heavy Duty Buttress Threads to Help Prevent Leaks Under Pressure
- Hex Body for Easy Installation

MATERIALS

- PP per ASTM D4101
- Heavy-Duty EPDM Gasket Seal

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	GASKETS	PRESSURE RATING
1/2" – 4" (DN15 – DN100)	GFPP	Thread x Thread	EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

CCP Series Tank-Tite™

1/2" TO 3" PVC



KEY FEATURES

- Robust PVC Upper and Lower Body Construction
- 17-7 PH Stainless Steel Wave Spring
- Rated to 150 PSI
- Fits with Hayward® BFAS/BFA Series Bulkhead Fittings
- Can be Used with All Bulkhead Fitting Materials

MATERIALS

- PVC Cell Class 12454 per ASTM D1784
- 17-7 PH Stainless Steel



The Tank-Tite is a revolutionary patented compression ring that eliminates the need to retighten gasketed bulkhead fittings! The Tank-Tite provides a constant load on the gasket of the bulkhead fitting to overcome, and compensate for, tank wall expansion/contraction in thickness due to changes in temperature and/or pressure within the tank. The Tank-Tite also imparts at the same time a constant load on the bulkhead fitting nut that reduces the possibility of loosening of the nut due to vibration within the system.

SELECTION CHART

SIZE	MATERIAL	SPRING	PRESSURE RATING
1/2" – 3" (DN15 – DN80)	PVC	17-7 PH SSSL	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

SF Series Self-Aligning Bulkhead Fittings

1", 2" AND 3" PVC



KEY FEATURES

- PVC
- Enables Easy Piping Connections to Domed Tanks
- Swivel Ball Connection Corrects for Curved Tanks
- Enables Straight Pipe Connections up to 27° of Offset Angle
- PTFE Ball Seal
- FPM or EPDM Gasket Seal

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1", 2" and 3" (DN25, DN50 and DN80)	PVC	Thread x Thread	FPM or EPDM	75 PSI @ 70°F 5 Bar @ 21°C Non-Shock

AR Series Air Release Valves

3/4" PVC BODY WITH PP BALL



KEY FEATURES

- PVC Body with PP Ball
- Reliable Tank Air Venting
- Prevents Tank Overflow
- Hollow, Floating Ball Design
- Closes at 0 PSI
- FPM or EPDM Seals
- Standard Screen

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
3/4" (DN20)	PVC Body PP Ball	Socket and Threaded	FPM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

VB Series Vacuum Breakers

3/4" PVC



KEY FEATURES

- PVC Body
- Reliable Venting of Tanks and Piping Systems
- Advanced Design for Fast Draining
- Easy Installation
- Compact
- No Metal Parts to Stick or Jam
- FPM Membrane
- Use with BFAS/BFA Series Bulkhead Fitting to Vent Tanks (Fits 1-1/2" Only)

SELECTION CHART

SIZE	MATERIAL	SEALS	PRESSURE RATING
3/4" ^{**} (DN20)	PVC	FPM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* NPT Connection

BVX Series Ready Flanges

1" TO 4" PVC, CPVC AND GFPP



KEY FEATURES

- PVC, CPVC and GFPP
- One-Piece Construction
- Integral Molded Nipple
- Eliminates the Need for an Extra Fabricated Joint – Preventing a Possible Leak Path
- Easily Converts Socket Valves to Flanged
- ANSI Class 150 Bolt Pattern


OPTIONS

- Threaded to Flanged


SELECTION CHART

SIZE	MATERIAL	END CONNECTION	PRESSURE RATING
1" – 4" (DN25 – DN100)	PVC or CPVC	Spigot x Flanged	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock
	GFPP	Threaded x Flanged	


Operating Temperature/Pressure for 150 PSI/10 Bar Rated Products (EXCEPT FILTER HOUSINGS)

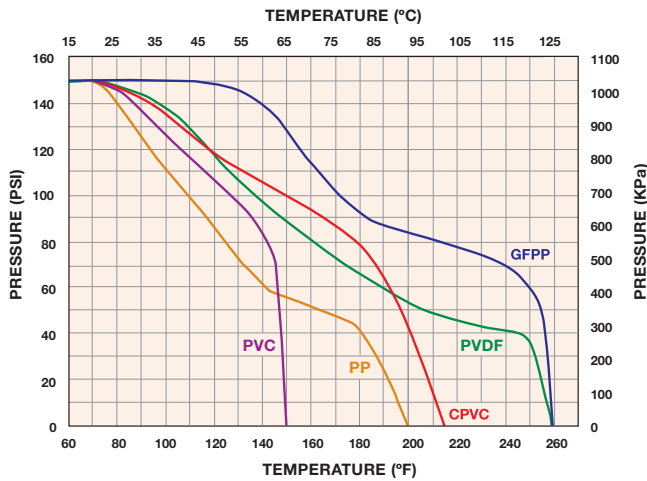

Operating Temperature/Pressure for 235 PSI/16 Bar Rated Products

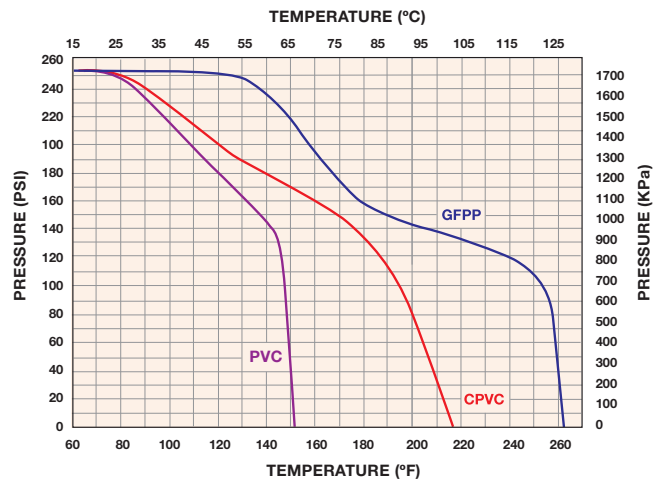

Operating Temperature/Pressure for 250 PSI/17 Bar Rated Products

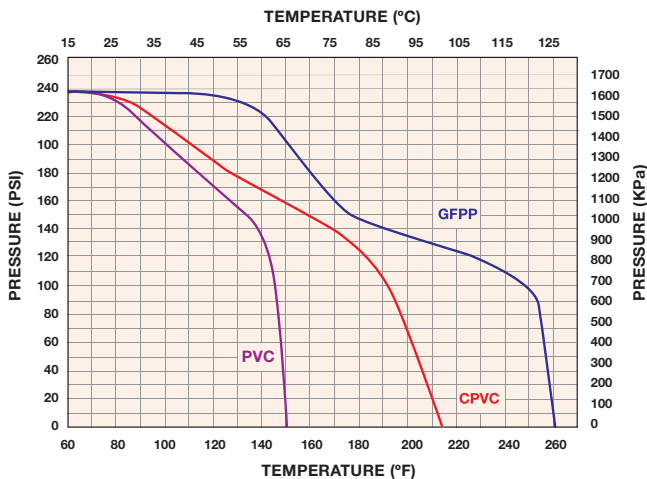

Pressure Loss Calculation Using Cv Factor

PRESSURE LOSS CALCULATION FORMULA

$$\Delta P = \left[\frac{Q}{C_v} \right]^2$$

ΔP = Pressure Drop

Q = Flow in GPM

Cv = Flow Coefficient

The pressure loss across a valve or filter can be calculated using the system's flow rate and the Cv factor for that valve or filter. For example, a 1" valve with a Cv factor of 8 will have a 4 PSI pressure loss in a system with a 16 GPM flow rate $(16 \div 8)^2 = 4$

Notes:

1. Working pressure (non-shock) figures are the maximum recommended for the indicated pressure.
2. It is recommended that the minimum process fluid temperature for the Hayward® product not fall below 34°F.

Basket Sizes for Hayward Simplex / Duplex Thermoplastic Strainers

PRESSURE DROP CORRECTION FACTORS FOR VARIOUS SIZE BASKET SCREENS


PLASTIC		STAINLESS STEEL		STAINLESS STEEL	
PERFORATION	CORRECTION FACTOR	PERFORATION	CORRECTION FACTOR	MESH	CORRECTION FACTOR
1/32"	1.05	1/32"	0.82	20	0.79
1/16"	1.00	3/64"	0.63	40	1.01
1/8"	0.58	1/16"	0.74	60	1.20
3/16"	0.46	5/64"	0.50	80	1.16
		7/64"	0.51	100	1.20
		1/8"	0.58	200	1.09
		5/32"	0.37	325	1.22
		3/16"	0.46		
		1/4"	0.58		
		3/8"	0.45		
		1/2"	0.48		

Note: To calculate pressure drop through vessels using other than 1/16" perforated baskets, first calculate the pressure drop using the listed Cv, and then multiply the result by the correction factor in the Correction Factors chart above.

COMPARATIVE PARTICLE SIZE

MESH	INCHES	MICRONS	MESH	INCHES	MICRONS	MESH	INCHES	MICRONS
3,250	0.0002	6	130	0.0043	110	24	0.028	718
1,600	0.0005	14	120	0.0046	118	20	0.034	872
750	0.0010	25	110	0.0051	131	18	0.039	1,000
325	0.0016	40	100	0.0055	149	16	0.045	1,154
250	0.0024	62	90	0.0061	156	14	0.051	1,308
200	0.0029	74	80	0.0070	179	12	0.060	1,538
180	0.0033	85	70	0.0078	200	10	0.075	1,923
170	0.0035	90	60	0.0092	238	8	0.097	2,488
160	0.0038	97	50	0.0117	300	6	0.132	3,385
150	0.0041	100	40	0.015	385	5	0.159	4,077
140	0.0042	108	30	0.020	513	4	0.203	5,205

Operating Temperature/ Pressure for Bag & Cartridge Filter Housings

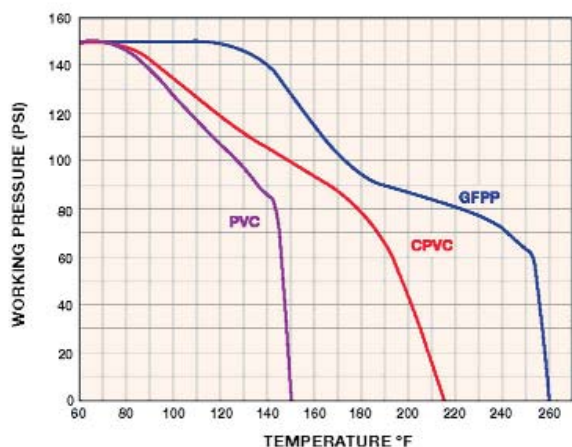

CARTRIDGE ADAPTER SELECTION CHART


CARTRIDGE TYPE	AVAILABLE YES/NO	
	CFLV SINGLE LENGTH	CFLV DOUBLE LENGTH
2-1/2" – 2-3/4" DOE/222XCAP	Yes	Yes
4-1/2" DOE/222XCAP	Yes	Yes
Hayward 7"x16" DOE	Yes	No
Hayward 7"x16" DOE (Double Stacked)	No	Yes
Hayward 7"x30"	No	Yes
7-3/4" DOE	Yes	Yes

Consult Hayward® for Available Cartridges.

Z Series Specifications

PERFORMANCE SPECIFICATIONS BY PUMP SIZE

PUMP SIZE	FLOW RATE (GPH)	LINE PRESSURE (PSI)	STROKE CAPACITY (CC/STROKE)	Ø CONNECTIONS IN/OUT (INCHES)	FREQUENCY MAX (STROKE/MIN)	CONSUMPTION (W)
100	1.06	175	0.42	0.17" x 1/4"	160	12.2
	1.32	145	0.52			
	1.58	116	0.63			
	2.11	29	0.83			
200	1.85	232	0.38	0.17" x 1/4"	300	23.9
	2.64	145	0.55			
	3.96	72	0.83			
	4.75	14	1.00			
500	7.90	73	1.11	5/16" x 7/16"	300	22.2
	10.50	58	1.39			
	12.00	29	2.22			
	29.00	0	3.00			

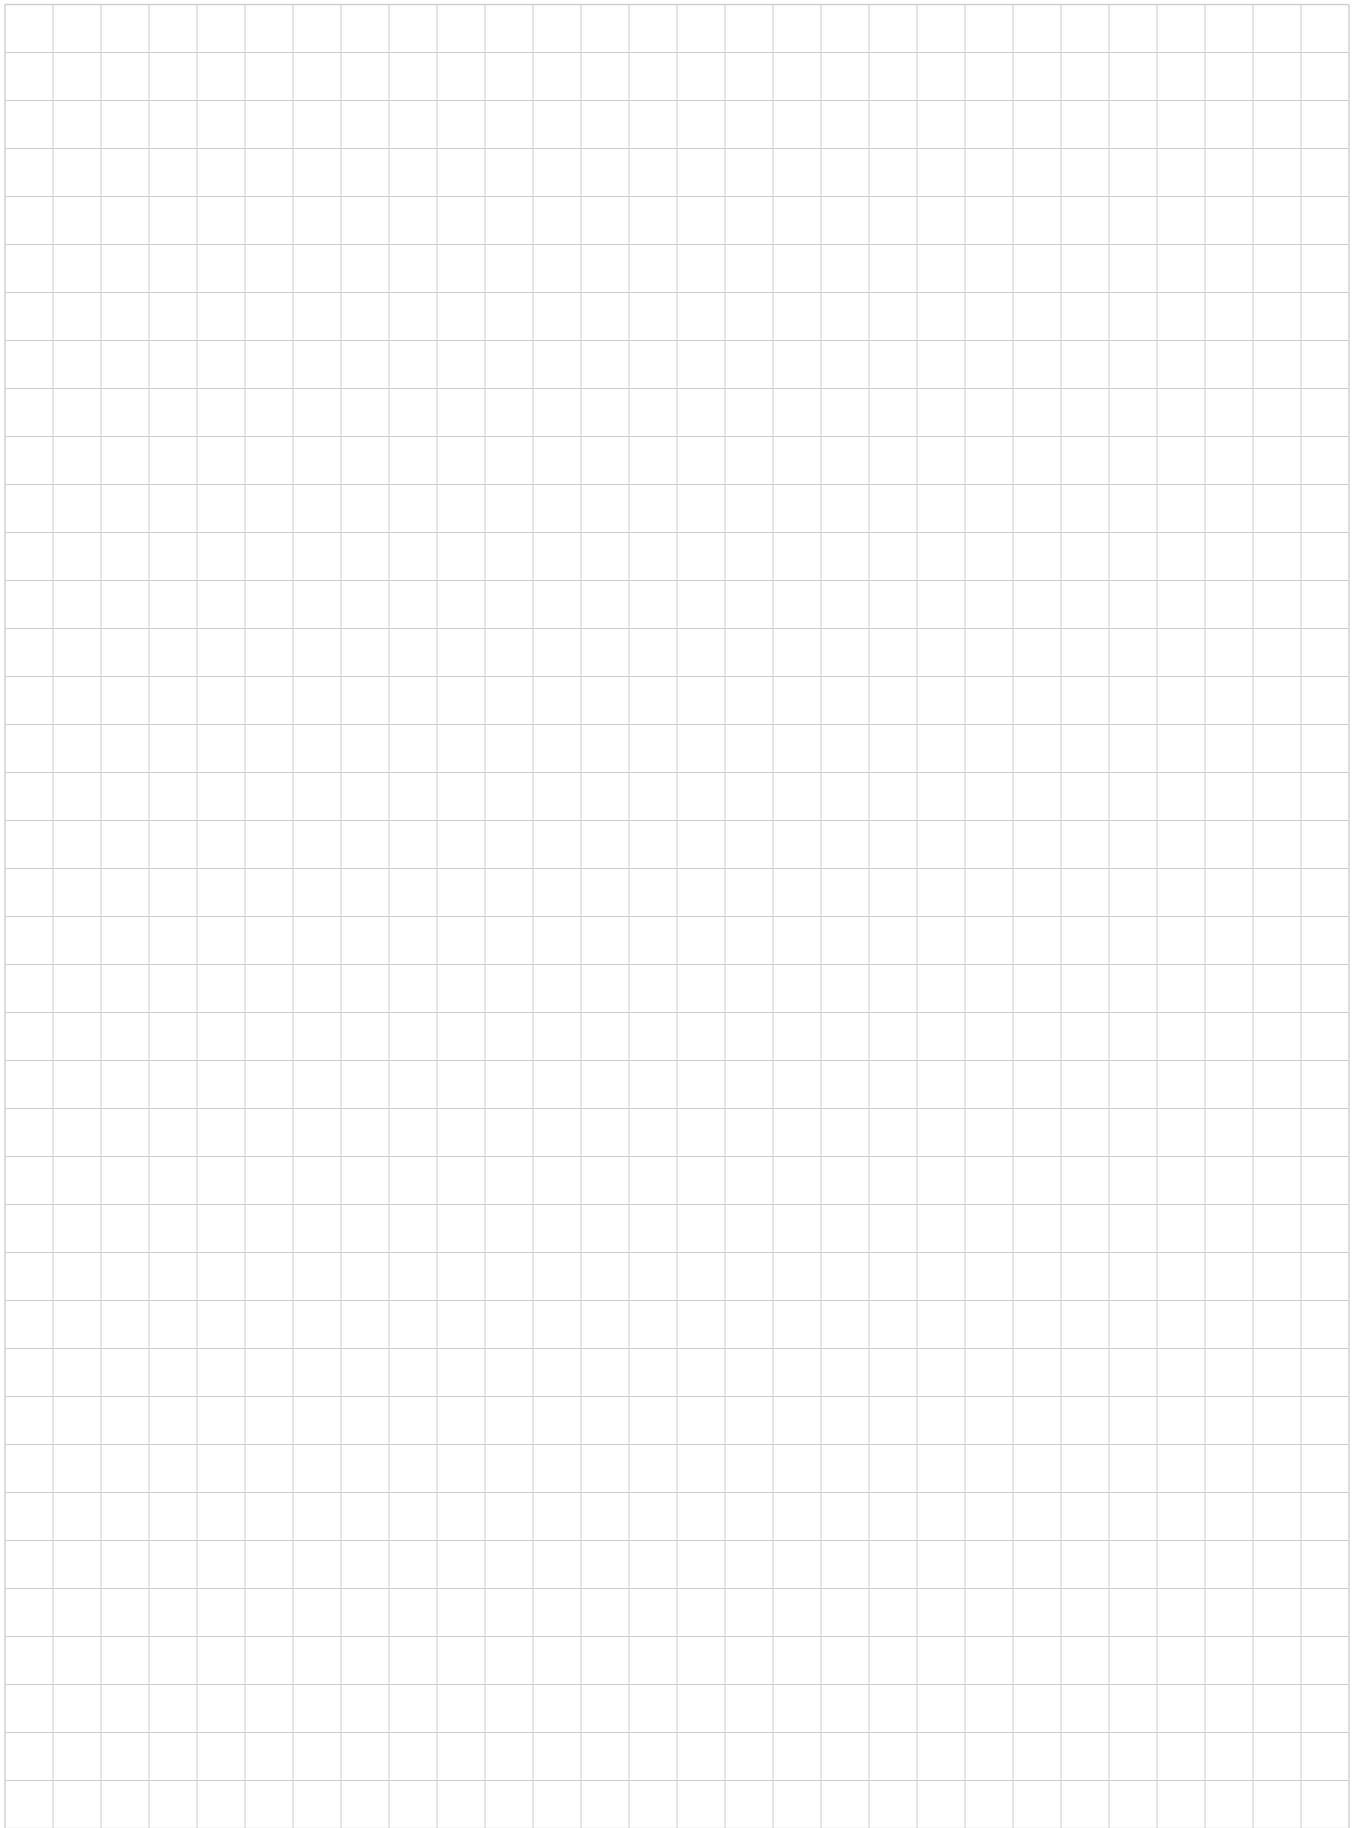



NSF/ANSI Standard 61 is a standard defining the requirements for products that are destined for use in drinking water systems. In summary, the standard requires immersion testing of all products that will come into contact with drinking water for any chemicals,

compounds, elements, etc. that may leach into the water that passes through the product.

Hayward products that are NSF 61 certified can easily be found on the NSF website, www.NSF.org. Additionally, those products certified to NSF61-G are also certified to NSF/ANSI 372 and conforms with the lead content requirements for "lead free" plumbing as defined by California, Vermont, Maryland and Louisiana state laws and the U.S. Safe Drinking Water Act.

- Eastar is a registered trademark of Eastman.
- Hastelloy is a registered trademark of Haynes International, Inc.
- Monel is a registered trademark of Special Metals Corporation.
- Santoprene is a registered trademark of Advanced Elastomer Systems.

THE FOLLOWING HAYWARD FLOW CONTROL PRODUCTS COMPLY WITH THIS DIRECTIVE


PRODUCT	SIZE	WATER CONTACT TEMP	WATER CONTACT MATERIAL
TB SERIES BALL VALVES			
Hayward True Union Ball Valve (PVC)	1/4" - 4"	CLD23	MLTPL
Hayward True Union Ball Valve (CPVC)	1/4" - 4"	CLD23	MLTPL
TC SERIES CHECK VALVES			
Hayward True Union Ball Check Valve (PVC)	1/4" - 4"	CLD23	MLTPL
Hayward True Union Ball Check Valve (CPVC)	1/4" - 4"	CLD23	MLTPL
BYV SERIES BUTTERFLY VALVES			
Hayward Butterfly Valve (PVC/EPDM)	2" - 12"	CLD23	MLTPL
Hayward Butterfly Valve (CPVC/EPDM)	4" - 12"	D. HOT	MLTPL
BYCN SERIES BUTTERFLY VALVES (PVC/EPDM)*	3" - 8"	CLD23	MLTPL
SIMPLEX SB SERIES STRAINERS**			
Hayward Simplex Basket Strainer (PVC)	1/2" - 8"	CLD23	MLTPL
Hayward Simplex Basket Strainer (CPVC)	1/2" - 8"	D. HOT	MLTPL
BFA SERIES (PVC/EPDM) BULKHEAD	1/2" - 6"	CLD23	MLTPL
BFAS SERIES (PVC/EPDM) BULKHEAD	1/2" - 3"	CLD23	MLTPL
VALVE - OTHER			
Universal Stopcock™	1/4"	CLD23	MLTPL

* Certified for use in distribution systems only.

** Certified for use in water treatment plant applications only with a minimum daily flow rate of 3,120 gallons.

NOTE: Unless otherwise indicated for Materials, Certification is only for the Water Contact Material shown in the Listing.

Always consult NSF Listing online as changes and updates may occur.

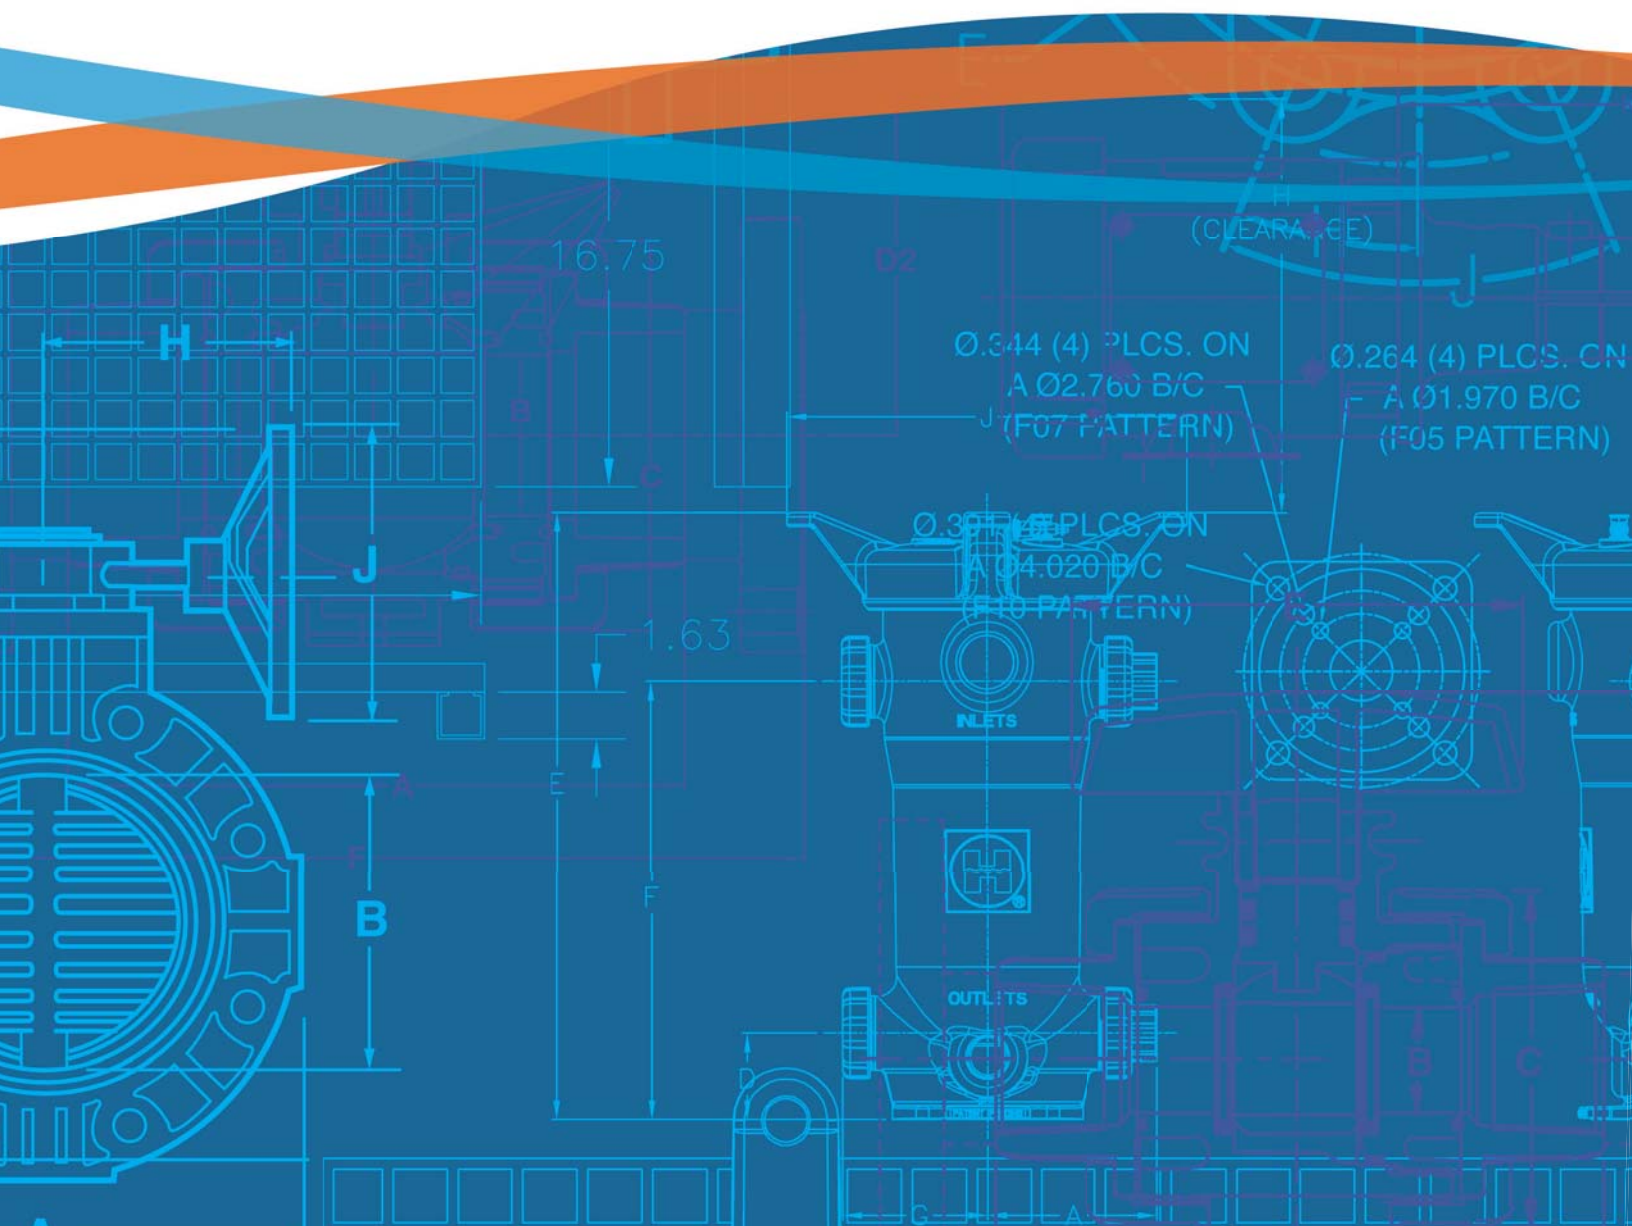

Hayward is a registered trademark and Profile2,
 OIC2, Stopcock and Tank-Tite are trademarks
 of Hayward Industries, Inc.
 © 2016 Hayward Industries, Inc.

PPG22